



SELECT PRODUCTS 2019

pure LIGHTING
EXCITEMENT

Contents

7P HEX IP	25	PAR Z MOVE	19
7PZ IP	25	PAR Z100 3K/ZP100 3K	34
12PX HEX/PEARL	30	PAR Z100 5K	33
12P HEX IP	24	PAR Z120 RGBW/ZP120 RGBW	34
18P HEX	30		
18P HEX IP	24	SABER SPOT DTW	32
32 HEX PANEL/PEARL	23	SABER SPOT GO	32
		SABER SPOT RGBW	31
		SABER SPOT WW	31
ADJ TOURING CASES	46		
AV2	4	ULTRA HEX BAR 6	28
AV2 RB1	4	ULTRA HEX BAR 12	28
AV4 IP	5	UV 72 IP	40
AV4 RB1	5	UV COB CANNON	40
AV4 RSB	5		
AV6RB2 Rigging Bar	6	VIZI BEAM 5RX	16
AV6X	6	VIZI BEAM RXONE	16
AV PRODUCT ACCESSORIES	7	VIZI BSW300	15
		VIZI CMY300	12
COB CANNON WASH DW ST	38	VIZI CMY 16RX	13
COB CANNON WASH ST/PEARL ST	38	VIZI HEX WASH7	18
		VIZI Q WASH7	18
DOTZ MATRIX	29	VIZI WASH Z19	17
DOTZ PAR 100	29		
		WiFLY EXR HEX5 IP	26
ELEMENT HEX IP/PEARL	22	WiFLY EXR QA5 IP	26
ELEMENT QA IP	22	WiFLY EXR QA12BAR IP	27
ENCORE BURST 100IP	35		
ENCORE FR20 DTW	35		
ENCORE FR50z	36		
ENCORE FR150z	36		
ENCORE PROFILE 1000 WW/COLOR	37		
ENTOUR CYCLONE	44		
ENTOUR HAZE PRO	44		
ENTOUR ICE	42		
ENTOUR SNOW	44		
ENTOUR VENUE	43		
ENTOUR VT-1	43		
ENTOURAGE	43		
FFJPWR WR	45		
FOCUS SPOT 4Z	14		
FOCUS SPOT THREE Z PEARL	15		
FOG FURY JETT PRO	45		
FS600LED	39		
HYDRO BEAM X1	11		
HYDRO BEAM X2	10		
MCTRL300	8		
MEGA TRI BAR	27		
MIDICON 2	8		
MOD HEX100	20		
MOD QA60	20		
MOD QW100	21		
MOD TW100	21		
NOVASTAR MCTRL 4K	8		
NOVASTAR VX4S	7		





AV2

SPECIFICATIONS

- Pixel Pitch: 2.97mm (0.17")
- LED Configuration: 3-in-1 SMD2121 LED
- Pixel Density: 168x168; 112896 per square meter
- Panel Size: 19.75" x 19.75" x 3" / 500 x 500 x 73mm
- Module Quantity: 4
- Module Size: 250 x 250mm
- Module Resolution: 84 x 84 pixels
- Panel Weight: 17.64lb / 8kg
- Surface Flatness: Gaps<0.5mm
- Brightness: 1000 NITS
- View Angle: Horizontal 160°/Vertical up 60° down 60° @ 9.75 ft. (2.97m)
- Gray Scale: 14-bit
- Brightness Adjustment: 0~100% / 100 Levels
- Processing: 14-bit
- Input Voltage: 100~240V 50-60Hz
- Max. Power Draw: 120W/per panel
- Ave. Power Draw: 48W/per panel
- Power/Data: Power = PowerCon In/Out; Data = EtherCon In/Out
- Operating Temperature : Celcius : -20° to +40°
- Humidity: 10-90%
- Operating Life/MTBF: @ 50,000 hrs
- Control Mode: Nova Star Synchronous System with Control via DVI
- Frame Update Frequency: 50-60Hz
- Scan Mode: 1/21
- Refresh Rate: ≥1920Hz
- Protection Level: IP20 (Front and Back)
- Out of Control Rate: <0.02%

NEW!



CODE: 1226300116

ADJ TOURING CASE 8X AV2

- Fits 8x AV2 video panels
- 9mm Plywood
- Butterfly Latches
- Swivel Castors

CODE: 1226300118



AV2 RBI

- Single panel rigging bar for AV2.
- Up to 15 panels max vertical hang.
- Can also be used as Floor Base.

CODE: 1226300117



AV4 IP

SPECIFICATIONS

- Pixel Pitch: 4.81mm (0.19")
- LED Configuration: 3-in-1 SMD1921 LED
- Pixel Density: 104x104; 43264 per square meter
- Panel Size: 19.75" x 19.75" x 4" / 500 x 500 x 100mm
- Module Quantity: 2
- Module Size: 250 x 500mm
- Module Resolution: 52 x 104 pixels
- Panel Weight: 20lbs. / 9kg.
- Surface Flatness: Gaps<0.5mm
- Brightness: 4000 NITS
- View Angle: Horizontal 140°/Vertical 140°
- Gray Scaler: 14-bit
- Brightness Adjustment: 0~100% / 100 Levels
- Processing: 14-bit
- Input Voltage: 100~240V 50-60Hz
- Max. PowerDraw: 180W/per panel
- Ave. Power Draw: 60W/per panel
- Power/Data: Power = True1 PowerCON In/Out; Data = IP65 etherCON In/Out
- Operating Temperature: Celsius : -10° to +50°
- Humidity: 10-90%
- Operating Life/MTBF: @ 50,000 hrs
- Control Mode: Nova Star Synchronous System with control via DVI
- Frame Update Frequency: 50-60Hz
- Scan Mode: 1/16
- Refresh Rate: ≥1920Hz
- Protection Level : IP65 Outdoor rated
- Out of Control Rate <0.02%



ADJ TOURING CASE 8X AV4

- Fits 8x AV4IP video panels
- 9mm Plywood
- Butterfly Latches
- Swivel Castors

CODE: 1521000305



CODE: 1226300070



AV4 RSB

Rear Support Bracket for AV4IP Video Panels

CODE: 1226300059

AV4 RBI

- Single panel rigging bar for AV4IP
- Up to 15 panels max vertical hang

CODE: 1226300057



Power Link Cable AV4IP

Product Code	Description
1621000069	PC 1,8 Powercon True1 – Schuko
1621000075	PLC True 1 link 1,0m STR
1621000076	PLC True 1 link 1,5m STR
1621000077	PLC True 1 link 3,0m STR
1621000104	STR True 1 PLC 4,0m
1621000079	PLC True 1 link 7,0m STR
1621000080	STR True 1 PLC 15m
1621000081	PLC True 1 link 30m STR

Data Link Cable AV4IP

Product Code	Description	Product Code	Description
1226300073	CAT6IP3 1,0m	1226300079	CAT6IP10FC 3,0m
1226300074	CAT6IP5 1,5m	1226300080	CAT6IP16FC 5,0m
1226300075	CAT6IP10 3,0m	1226300081	CAT6IP25FC 7,5m
1226300076	CAT6IP16 5,0m	1226300082	CAT6IP50FC 15m
1226300077	CAT6IP25 7,5m	1226300083	CAT6IP100FC 30m
1226300078	CAT6IP50 15m		

AV6X

SPECIFICATIONS

- Pixel Pitch: 6.0mm (0.25")
- LED Configuration: 3-in-1 SMD2121 LED
- Pixel Density: 96x96; 27,777 per square meter
- For indoor use only
- Panel Size: 22.75" x 22.75" x 3" / 576 x 576 x 75mm
- Module Quantity: 4
- Module Size: 288 x 288mm
- Module Resolution: 48 x 48 pixel
- Panel Weight: 23lbs. / 8.15Kg
- Surface Flatness: Gaps<0.5mm
- Brightness: 1200 NITS
- View Angle: Horizontal 140°/Vertical 140°
- Gray Scale: 14Bit
- Brightness Adjustment: 0~100% / 100 Levels
- Processing: 14Bit
- Input Power: 100~240V 50-60Hz
- Max. Power Draw: 300W/per panel
- Ave. Power Draw: 120W/per panel
- Power/Data: Power = PowerCON In/Out; Data = EtherCon In/Out
- Operating Temperature: Celsius: -20°+ 40°
- Humidity: 10-90% (No Condensation)
- Control Mode: Nova Star Synchronous System with Control via DVI
- Frame Update Frequency: 50-60Hz
- Scan Mode: 1/12
- Refresh Rate: ≥1200Hz
- Operating Life / MTBF: @ 100,000 hrs
- Protection Level: IP20 (Front and Back)
- Out of Control Rate: <0.02%

CODE: 1226300054



ADJ TOURING CASE 8X AV6

- Fits 8 AV6X video panels
- 9mm Plywood
- Butterfly Latches
- Swivel Castors

CODE: 1521000306



AV6RB2 Rigging Bar

- Single panel rigging bar for AV6X
- Up to 20 panels max vertical

CODE: 1226300053



AV PRODUCT ACCESSORIES AV2 / AV6X

AV PRODUCT ACCESSORIES

First Data Cable

Product Code	Description
1226300039	CAT6S 7,5m AV6 FIRST CABLE
1226300040	CAT6S 15m AV6 FIRST CABLE
1226300041	CAT6S 30m AV6 FIRST CABLE



Data Link Cable

Product Code	Description
1226300048	CAT6 CBL 0,9m
1226300047	CAT6 CBL 1,5m
1226300046	CAT6 CBL 3m
1226300045	CAT6 CBL 4,5m
1226300044	CAT6 CBL 7,5m
1226300043	CAT6 CBL 15m
1226300042	CAT6 CBL 30m



First Power Cable

Product Code	Description
1621000107	MPC PowerCON - CEE 7/7 2m
1621000108	MPC PowerCON - CEE 7/7 5m
1621000109	MPC PowerCON - CEE 7/7 10m
1621000110	MPC PowerCON - UK 2m
1621000111	MPC PowerCON - UK 5m
1621000112	MPC PowerCON - UK 10m



Power Link Cable

Product Code	Description
1621000100	PLC PowerCON link 0,5m STR
1621000101	PLC PowerCON link 1,0m STR
1621000102	PLC PowerCON link 3,0m STR
1621000103	PLC PowerCON link 5,0m STR
1621000104	PLC PowerCON link 10,0m STR
1621000105	PLC PowerCON link 15,0m STR
1621000106	PLC PowerCON link 30,0m STR



NOVASTAR VX4S

Video Processor/Switchers/Scaler

SPECIFICATIONS

- User Friendly LED Display Controller
- Screen Configuration via on board menu system- No Computer needed.
- Built In Scaler
- Video Input: (1) DP / (1) HDMI / (2) VGA / (1) DVI / (2) CVBS / (1) SDI
- (4) RJ45 Outputs for up to 2.35 million Pixels of LED Control
- (2) USB Type A and (2) USB Type B Ports (1 set on each side)
- Up to 1920 x 1200 p @60Hz Input Resolution
- Multiple Video Signal Format Support
- Cascade Multiple Units Together Via USB
- 19 inch/1U Rack Mountable
- Weight: 5.6 lbs. (2.55 kg)
- INCLUDED CABLES DP, VGA, USB, HDMI, DVI, CAT5, Power



CODE: 1226300067



MCTRL300

Video processor

SPECIFICATIONS

- Control Method: USB Interface Via Novastar LCT MARS (PC) & Novastar SmartLCT (MAC)
- Frame Update Frequency: 50-60Hz
- Refresh Rate: 1200Hz
- (2) RJ45 Outputs for up to 1.3 million Pixels of LED Control
- Video Interface: DVI
- Control Distance: Ethernet Cable <100m or Fiber Optic>120m
- Supported Modes: 1280 x 1024, 1024 x 1200, 1600 x 848, 1920 x 712, and 2048 x 668
- Brightness Correction: Pixel, Module, Cabinet
- Requires a computer (sold separately)

CODE: 1226300034



NOVASTAR MCTRL 4K

SPECIFICATION

- Product Type: Independent Controller
- Input Resolution: Up to 3840*2160@60Hz
- Capacity: 8.3 million pixels
- Supply Voltage: AC-100-240V-50/60HZ
- Control Method: USB/TCP/IP
- Video Interface: DP1.2 x 1, HDMI2.0 x 1, dual-link DVI x 2
- Audio Interface: HDMI
- Video Format: RGB,YCrCb4:4:4, YCrCb4:2:2, YCrCb4:2:0
- Output Interface: Neutrik EtherCONx16/OPT Portsx4
- Bit Depth Of Video Resource: 8/10/12bit
- Light Sensor Interface: Doesn't Support
- Certification: CE, ROHS, FCC, UL&CUL, EAC,IC,CB

CODE: 1226300114



MIDICON 2

SPECIFICATIONS

- USB Powered
- Tactile Spring Loaded Buttons
- Midi Mapper Software
- (6) General Purpose Buttons
- (1) Master and (8) Control 100mm Faders
- (16) Playback Page Buttons Above Faders
- (8) Rotary Dials with Push-In Selection Above Faders
- (8) Dual Color Feedback LEDs Above Faders
- (1) Blackout Button
- (32) Instant Effects or Scene Calling Buttons
- (8) Bump / Momentary Effect Buttons
- (4) Rotary Encoder Wheels with Push-In Selection
- USB Input for Gooseneck Work Light (not included)
- Removable Outer Case for 6U Rack Mounting
- 6U Rack Mount Kit Included
- Kensington™ Security Device Slot
- (6) General Purpose Buttons
- (1) Master and (8) Control 100mm Faders
- (16) Page Playback Buttons Above Faders
- (8) Rotary Dials with Push-In Selection Above Faders
- (1) Blackout Button
- (32) Instant Effect or Scene Calling Buttons
- (8) Bump / Momentary Effect Buttons
- (4) Rotary Encoder Wheels with Push-In Selection
- USB 2.0 Type "B" Port
- Length: 20.2" (514mm)
- Width: 12.9" (328mm)
- Vertical Height: 3.6" (91mm)
- Weight: 15.0 lbs. (6.8 kg)



CODE: 1323000028



HYDRO

NEW!

HYDRO BEAM X2

The ADJ Hydro Beam X2 is an IP65 rated professional moving head fixture with an Osram Sirius HRI 370W LL, 6,000 hour, discharge lamp that produces a razor sharp 3-degree beam.

With robust construction and IP65-ratings, the Hydro Beam X2 is designed for both indoor or outdoor use. Its durable casing protects it from dust, sand, moisture and liquids, making it ideal for use in all situations from dusty deserts in California to rainy fields in England. Perfect for festivals and outdoor events, as well as installation in open-air clubs and other outside entertainment spaces, this groundbreaking fixture offers an extended operational life and reduced maintenance requirement due to its sealed casing design.

The Hydro Beam X2 has a wealth of features such as linear motorized focus, 8-facet circular prism with overlay, 8-facet linear prism with overlay, glass and metal GOBOS that rotate and are replaceable, 3 GOBO reducers, and an independent frost filter for wash effects. Its fitted with 5-pin IP65 DMX In/Out and Seetronic IP65 In/Out. It offers a USB port for software updates. All connections are IP65 rated with rubber protective covers.



SPECIFICATION

- Light Source: Osram Sirius HRI 370W LL Long Life (6,000 hrs) Discharge
- Color Temperature: 8000K
- CRI: 70
- Beam Angle: 3-degrees
- Colors: 10 colors + 3200K & 5600K + open
- Gobos: 1 GOBO Wheel with 5 glass GOBOS, 3 metal GOBOS and 3 GOBO reducers + open, All GOBOS rotate and are removable, GOBOS outside diameter: 9.8mm, GOBOS image diameter: 6.5mm
- Focus: Motorized
- Prism: 1 linear 8 facet, 1 circular 8 facet with prism layering
- Filter: Independent frost filter
- 2 Control Modes: DMX-512, RDM
- 2 Channel Modes: 14/16
- Control: OLED display
- Pan/Tilt: 540° / 270°
- Dimming: 0% - 100%
- Power Draw: 490W
- IP65 rated – protects from dust, sand, moisture, liquid
- Dimensions (LxWxH): 16"x13"x25" / 402x330x630mm
- Weight: 64lbs/ 29kg.

CODE: 1237000201



NEW!

HYDRO BEAM XI

The ADJ Hydro Beam X1 is an IP65 rated professional moving head fixture with a 100W Osram Sirius HRI, 6,000 hour, discharge lamp that produces a razor sharp 3-degree beam. Its compact sizes offers quick movement.

With robust construction and IP65-ratings, the Hydro Beam X1 is designed for both indoor or outdoor use. Its durable casing protects it from dust, sand, moisture and liquids, making it ideal for use in all situations from dusty deserts in California to rainy fields in England. Perfect for festivals and outdoor events, as well as installation in open-air clubs and other outside entertainment spaces, this ground-breaking fixture offer an extended operational life and reduced maintenance requirement due to its sealed casing design.

The Hydro Beam X1 has several high performance features such 16-facet circular prism with overlay and an independent frost filter for wash effects. Its fitted with 3-pin IP65 DMX In/Out and Seetronic In/Out. It offers a USB port for software updates. All connections are IP65 rated with rubber protective covers.



SPECIFICATION


- Light Source: Osram Sirius HRI 100W Long Life (6,000 hrs) Discharge
- Color Temperature: 9000K
- CRI: 60
- Beam Angle: 3-degrees
- Colors: 12 colors + CTB & UV + open
- Gobos: 1 metal GOBO Wheel with 11 GOBOs, 4 GOBO reducers + open
- Focus: Motorized
- Prism: 16 facet rotating circular prism
- Filter: Independent frost filter
- 2 Control Modes: DMX-512, RDM
- 2 Channel Modes: 13/14
- Control: OLED display
- Pan/Tilt: 540° / 270°
- Dimming: 0% - 100%
- Power Draw: 199W @ 120V; 192W @ 220V
- IP65 rated – protects from dust, sand, moisture, liquid
- Dimensions (LxWxH): 16"x13"x25"/308x210x488mm
- Weight: 34.5lbs/ 15.5kg.

CODE: 1237000200

VIZI CMY300

The Vizi CMY300 is ADJ's next generation LED Hybrid moving head. It uses a specially designed 300W LED engine that offers massive output for most large venues and event productions. It is a great hybrid utility fixture as it acts as a beam, spot and wash all-in-one with a massive zoom range from 8 to 46-degrees. This allows for designers to get maximum effects from one fixture without having to crowd truss in an installation with multiple fixtures. It also allows for less fixtures to be packed in a truck for production events. What's more, is it comes in a smaller footprint than most other movers in its class. Plus, the Vizi CMY300 offers a CMY color mixing so designers can custom make colors to create a one-of-a-kind lightshow. The fixture has a built-in antenna with ADJ's WiFLY EXR wireless DMX that transmits a signal up to 2500 feet / 700M (line of sight).

The Vizi CMY300 offers motorized focus, motorized zoom, two rotating prisms (one 6-facet linear & one 3-facet circular), 2 GOBO wheels (1 wheel fixed metal & one wheel rotating/replaceable GOBOS).

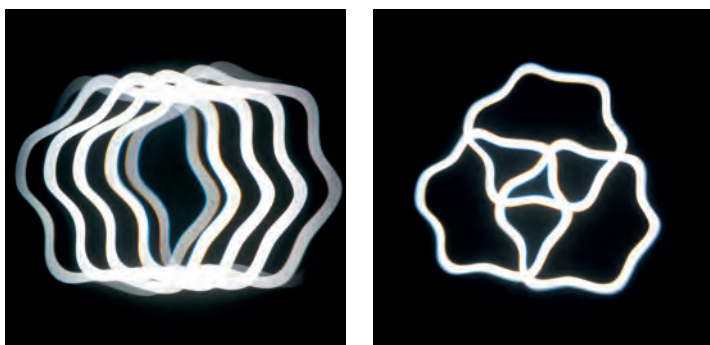

SPECIFICATION

- Light Source: 1 x 300W Cool White LED (50,000 hrs)
- CMY Color Mixing + Additional Color wheel: 9 + open (Including: CTO 3200K & UV)
- Gobos: 2 Separate Wheels - Wheel 1: 8 Fixed + Open (1 Beam Reducers Beam Mode), Wheel 2: 6 Rotating/Replaceable + Open (Size: 26.8mm; Viewable: 20mm)
- Zoom Range: 8 ~ 46-degrees
- Motorized Focus and Zoom
- 3 DMX Channel Modes: 21/24/26
- Prism: 3-facet Circular, 6-facet Linear Rotating
- Control: 3-pin and 5-pin DMX
- Filter: Frost Filter
- Pan/Tilt: 540° / 270°
- Electronic Dimming 0-100%
- Power Draw: 398W (3.31A @ 120V; 1.8A @ 220V)
- Multi-Voltage operation: 100-240V 50Hz/60Hz (Auto Sensing)
- Daisy chain max: 3 fixtures (@120V); 7 fixtures (@230V)
- Dimensions (LxWxH): 14.75"x12.75"x24.5" / 370x325x619mm
- Weight: 51lbs/ 23kg.

CODE: 1237000175



VIZI CMY 16RX

A true Spot/Beam/Wash hybrid Moving Head fixture, the ADJ Vizi CMY 16RX features dual Prism Layering, GOBO Morphing of dual gobo wheels, motorized zoom and motorized focus. Other professional features include: Frost filter to turn the hard edge beam to a wash, 5 & 16-facet rotating prisms and stepper motors for quick, precise movement. The Vizi CMY 16RX offers a CMY color mixing module so designers can custom make colors to create a one-of-a-kind lightshow.

The Vizi CMY 16RX Moving Head fixture is powered by the revolutionary Philips® Platinum 16R discharge lamp technology (8000°K, 1,500 hr). The powerful Platinum 16R has an output comparable to a 575W fixture. It also offers a flat, even spot field and even more saturation of colors. The Vizi Hybrid 16RX is much faster than previous ADJ moving heads because it is much lighter in weight and more compact than other moving heads in its class.



SPECIFICATION

- Light Source: 1 x 330W Philips Platinum 16R MSD (1,500 hrs)
- Colour Temperature: 8000K
- CMY Color Mixing + Additional Color wheel with 9 colors plus white
- Gobos: 2 separate wheels - Wheel 1: 15 static GOBOS plus spot, Wheel 2: 9 rotating, replaceable GOBOS
- Motorised Iris
- Beam Angle: 2.3 ~ 10-degrees (Beam mode); 5 ~ 22-degrees (Spot mode); 22 ~ 63-degrees (Wash mode)
- 2 DMX Channel Modes: 23 or 25 channels
- Prism: 5-facet linear & 16-facet circular w/ macros, rotating & layering
- Control: 3-pin and 5-pin DMX
- Filter: Frost Filter
- Pan/Tilt: 540° / 270°
- Shutter: motorized
- Mechanical Dimming: 0%- 100%
- Power Draw: 515W
- Multi-Voltage operation: 100-240V, 50/60Hz
- Dimensions (LxWxH): 25"x16.25"x13" / 639x413x326mm
- Weight: 52lbs/ 23.2kg.

CODE: 1237000188



NEW!

FOCUS SPOT 4Z


The ADJ Focus Spot 4Z is a 200W LED Moving Head spot with motorized focus and motorized zoom allowing for a variable beam angle from 11 ~ 22-degrees. In addition, ADJ has fitted the Focus Spot 4Z with one GOBO wheel with rotating, replaceable GOBOs, 8 colors plus white and two prism effects: rotating 5-facet linear prism and 6-facet circular prism.



SPECIFICATION

- Light Source: 1 x 200W Cool White LED (50,000 hrs)
- Colors: 8 Colors + white
- Gobos: 6 Rotating, Replaceable GOBOs + Open (Size: 23mm; Viewable: 19mm; Thickness: 0.5mm)
- 3 Operational modes: Show Mode, DMX Mode & Program Mode
- Zoom Range: 11 ~ 22 degrees
- Focus: Motorized
- Prism: Rotating 5-facet Linear & Rotating 6-facet Circular
- PowerCON In/Out to daisy chain power
- 3-pin DMX In/Out
- USB firmware update port
- 3 DMX Channel Modes: 16/18/22
- Fine Pan & Tilt: 16-Bit
- Dimming & Fine Dimming (16-Bit) : 0-100% Electronic
- Dimming Modes: Standard
- Input Voltage: 100-240V 50Hz/60Hz (Auto Sensing)
- Dimensions (LxWxH): 17.67"x11"x6.85" / 449x280x174mm
- Weight: 18.29lbs/ 8.3kg.

CODE: 1237000204

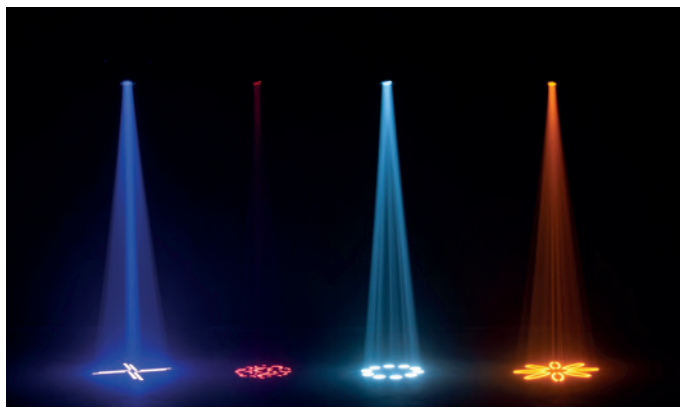


FOCUS SPOT THREE Z PEARL

SPECIFICATION

- Light Source: 1 x 100W LED Moving Head (50,000 hrs)
- Colors: 8 Colors + Spot
- 3 Operational Modes: Sound Active, Show Mode & DMX Controlled
- 2 DMX Channel Modes: 18/21
- Zoom: Motorized
- Focus: Motorized
- Prism: 6-facet circular & 6-facet linear
- 2 Gobo Wheels: Wheel 1 7 static Gobo = spot, Wheel 2 6 rotating gobo + spot - interchangeable (Size: 23.8mm, Viewable 20mm metal/glass)
- Beam Angle: 12-18-degree
- Dimming: Electronic 0% - 100%
- Strobe: Strobe Rate: 0.3-20Hz
- Pan/Tilt: 16-Bit Fine Pan/Tilt control
- Connection: 3-pin XLR In/Out
- Daisy chain: Power-Con AC In/Out on rear to Daisy chain power (up to 3 Focus Spot Three Z's @ 120V and 6 Focus Spot Three Z's @ 230V)
- Control: 4-Button DMX LCD menu with 180° Inverse View mode
- Multi-Voltage Operation: 100-230V, 50Hz/60Hz
- Power Draw: 230W
- Dimensions (LxWxH): 7.25"x11.25"x19.75"/183x284x489mm
- Weight: 26lbs/ 12kgs.

CODE: 1237000158

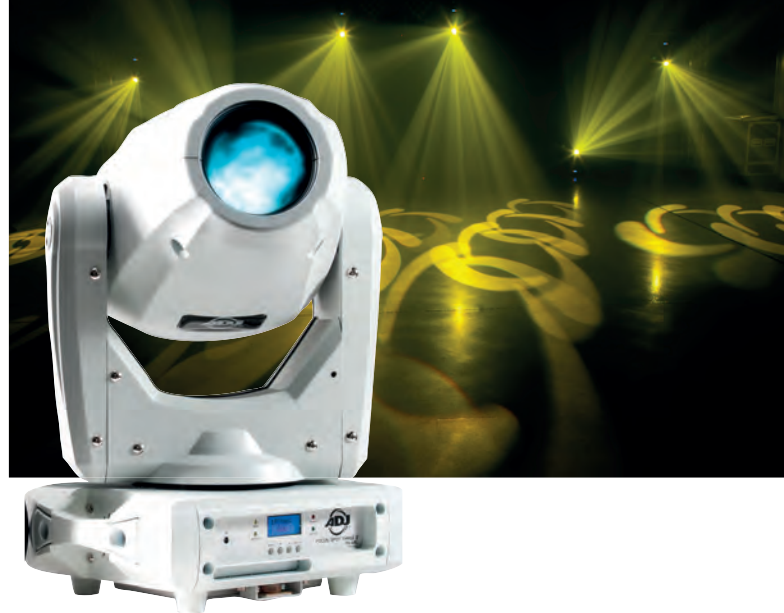

PHOTOMETRICS

LUX 12°	113400	29730	13090	7160	4510	3020
Diameter(m)	0.21	0.42	0.631	0.841	1.051	1.261
LUX 20°	59800	14100	6300	3640	2360	1700
Diameter(m)	0.299	0.598	0.897	1.196	1.495	1.793

VIZI BSW300

SPECIFICATION

- Light Source: 1 x 300W White LED (50,000 hrs)
- Colors: Color Wheel 1: 7 + Open
- Color Wheel 2: 7+ Open (CTO 3200k), CTC (5600k), UV
- 2 Gobo Wheels: Wheel 1: 6 Fixed + Open (3 Beam Reducers Beam Mode) Wheel 2: 7 Rotating/Replaceable + Open (6 Glass, 1 Metal)
- Beam Angle: 15-degrees
- Focus: Motorized
- 2 Channel Modes: 17/20
- Control: Control: LED DMX 4-Button menu system, 3-pin and 5-pin DMX
- Prism: 6-facet circular, 6-facet linear
- Filter: Frost Filter
- Pan/Tilt: 540° / 270°
- Shutter: Pulse effect; random strobe slow to fast
- Dimming: 0% - 100%
- Power Draw: 398W
- Dimensions (LxWxH): 14.75"x12.75"x21.5"/376x325x545mm
- Weight: 49lbs/ 22kg.

CODE: 1237000167




VIZI BSW 300 COLOR WHEELS




VIZI BSW 300 GOBO WHEELS




BEAM



WASH



SPOT



VIZI BEAM 5RX


SPECIFICATION

- Light Source: Philips® Platinum 5R discharge (3,000 hrs)
- Colour Temperature: 8000K
- Colors: 14 Colors + white, CTB + UV and split Colors
- Gobos: 17 static, fixed gobos + spot, gobo shake effect
- Focus: Motorized
- Prism: 8-facet Prism with macros
- Frost: Frost Filter
- 2 DMX Channel Modes: 16/19
- Beam Angle: 5-degree beam angle
- Dimming: Electronic 0% - 100%
- Strobe: Strobe effect
- Pan/Tilt: 540-degree/270—degree
- Shutter: Pulse effect; random strobe slow to fast
- Connection: 3-pin XLR In/Out
- Control: LED DMX 4-Button menu system
- LUX: 770000 @ 5M, 220000 @ 10M
- Multi-Voltage Operation: 100-240V, 50Hz/60Hz
- Power Draw: 237W
- Dimensions (LxWxH): 15.5"x12.75"x20.5"/394x325x522mm
- Weight: 42lbs/ 19 kg.

CODE: 1237000119



PHOTOMETRICS

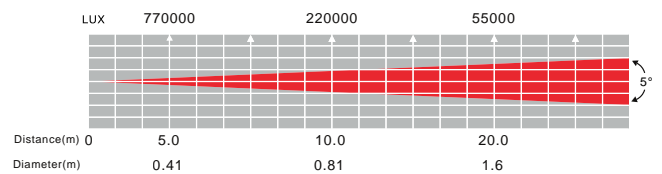

VIZI BEAM RXONE


SPECIFICATION

- Light Source: Osram® SIRIUS HRI 100W discharge (6,000 hrs)
- Colour Temperature: 9000K
- Colors: 14 Colors + white and split Colors
- Gobos: 15 static, fixed gobos + spot
- Prism: 16-facet Prism with macros
- Frost: Frost Filter
- 2 Operational Modes: DMX & Show Mode
- 2 DMX Channel Modes: 15/17
- Beam Angle: 3-degree beam angle - Auto X-Y repositioning
- Dimming: Electronic 0% - 100%
- Strobe: Strobe effect
- Pan/Tilt: 360-degee standard (540-degree optional)/270-degree
- Shutter: Pulse effect; random strobe slow to fast
- Connection: 3-pin XLR In/Out
- Control: LED DMX 4-Button menu system
- LUX: 99250 @ 10M, 70030 @ 15M
- Multi-Voltage Operation: 100-240V, 50Hz/60Hz
- Power Draw: 199W
- Dimensions (LxWxH): 9"x11"x15.25" /225x279x387mm
- Weight: 20lb/ 9.2kg

CODE: 1237000146



PHOTOMETRICS

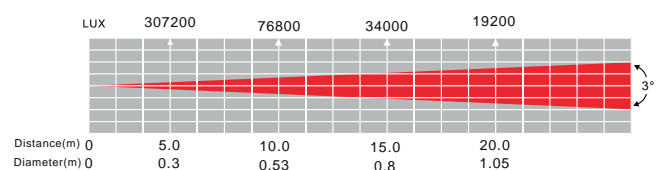



VIZI WASH Z19

The Vizi Wash Z19 is a 380W professional moving head wash fixture with variable motorized zoom (10 ~ 60-degrees) and 19 x 20W Quad (RGBW/4-IN-1) LEDs.

It features 5 zones of LED ring control, smooth dimming control from 0-100%, locking powerCON In/Out to daisy chain power, both 3-pin and 5-pin DMX In/Out and a built-in USB port for a convenient connection to update software if needed.

This fixture is ideal for stages, theaters, churches, nightclubs, concert venues and event productions.



SPECIFICATION

- Light Source: 19 x Osram 20W RGBW LED
- Motorized Zoom: 10 ~ 60-degrees
- 2 Control Modes: DMX-512, RDM
- Color display with touch button on two sides
- Built-in USB software upgrade port
- powerCON In/Out to daisy chain power
- Connection: 3-pin & 5-pin In/Out DMX
- 5 zones of LED ring control
- Smooth 0-100% Dimming
- Power Draw: 380W
- Various Strobe speeds

Preliminary information – More info coming soon

CODE: 1226100372

RGBW COLOR MIXING:




VIZI Q WASH7

SPECIFICATION

- Light Source: 7 x 40W RGBW LEDs (50,000 hrs)
- 2 Operational Modes: Program Mode & DMX Controlled
- 3 DMX Channel Modes: 17/19/23
- Electronic Dimming: 0% - 100%
- Strobe: Strobe effect
- Pan/Tilt: 630 or 540 degree/ 270-degree
- Connection: 3-pin and 5-pin XLR in/out
- Daisy chain: 5 fixtures max. (110V)/11 fixtures max. (240V)
- Control: LED DMX 4-button menu system
- Multi-Voltage Operation: 100-240V, 50/60Hz
- Power Draw: 305W
- Built-in Wifly EXR receiver
- Dimensions (LxWxH): 11.75"x8"x15.75"/300x200x400mm
- Weight: 19lbs/ 8.5kgs.

CODE: 1237000166

RGBW COLOR MIXING:

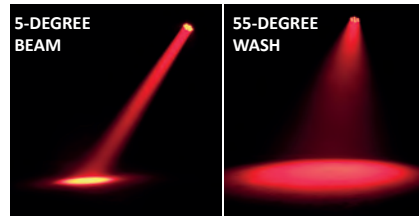


VIZI HEX WASH7

SPECIFICATION

- Light Source: 7 x 15W RGBWA+UV LEDs (50,000 hrs)
- 2 Operational Modes: Program Mode & DMX Controlled
- 3 DMX Channel Modes: 19/21/27
- Electronic Dimming: 0% - 100%
- Zoom: 5 - 55 degrees
- Strobe: Electronic strobe/pulse effect; random strobe slow to fast
- Pan/Tilt: 630 or 540 degree/ 270-degree
- Connection: 3-pin and 5-Pin XLR In/Out
- Daisy chain: 5 Fixtures Max. (110V)/11 Fixtures Max. (240V)
- Control: 4-Button DMX LCD menu with 180° inverse view mode
- Multi-Voltage Operation: 100-230V, 50Hz/60Hz
- Power Draw: 137W
- Built-in Wifly EXR receiver
- Dimensions (LxWxH): 11.75"x 8"x15.75"/300x200x400mm
- Weight: 19lbs/ 8.5kgs.

CODE: 1237000165

RGBAW COLOR MIXING + UV:

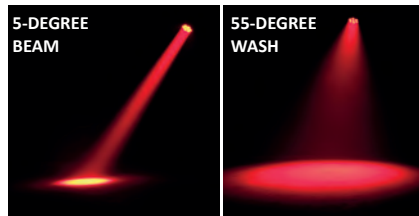

NEW!

PAR Z MOVE




The Par Z Move is the next generation fixture in ADJ's popular PAR Z100 Series of COB. LED Pars. It's powered by a high output 200W COB warm white LED on a moving head base. Featuring motorized zoom (9 ~ 43-degrees), an easy to install filter slot built-in to the head to add a color gel or diffusion filter, and 0-100% dimming plus 16-bit fine dimming for stages, theaters, churches, nightclubs, concert venues and event productions.

There are a variety of professional features such as: DMX and RDM control, pan & fine pan, tilt & fine tilt and a color display with 4 buttons to easily access all the built-in functions. Locking powerCON In/Out to daisy chain the power and 3-pin and 5-pin DMX IN/Out give lighting designers the best networking options on the market. There is also a built-in USB port to easily update the software if needed.

SPECIFICATION

- Light Source: 1 x 200W Warm White COB LED
 - Colour Temperature: 3000K
 - Motorized Zoom: 9 ~ 43-degrees
 - Pan: 540-degrees (plus 16-bit Fine Pan)
 - Tilt: 200-degrees (plus 16-bit Fine Tilt)
 - Control: DMX-512 & RDM
 - Various DMX control modes
 - Smooth 0-100% Dimming (plus 16-bit Fine Dimming)
 - Color display with touch button
 - Built-in USB software upgrade port
 - Locking powerCON In/Out to daisy chain power
 - Connection: 3-pin & 5-pin In/Out DMX
 - Easy to install color/diffusion filter slot next to the lens
 - Includes Omega bracket
 - Multi-voltage operation: 100-240V, 50/60Hz
 - Dimensions (LxWxH): 12" x 8.3" x 18" / 307x211x455mm
- Preliminary information – More info coming soon

CODE: 1226100371

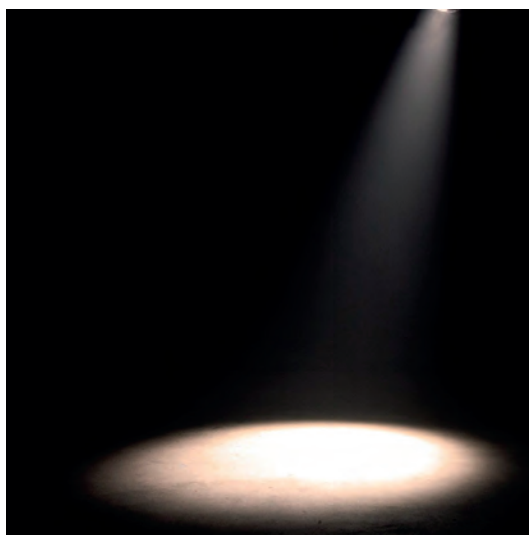

MOD HEX100

SPECIFICATION

- Light Source: 7 x 15W RGBWA+UV LED
- Beam Angle: 17-degrees
- Total Lumens: <1800
- LUX: 2665 @ 3M (9.8 ft.)
- Power Input & Output: PowerCON
- DMX: 3-pin & 5-pin In/Out
- Dimming: Electronic 0 - 100%
- Channel Modes: Control Channels: 6, 8, 11 or 12
- Operational Modes: 6 Operational Modes
- Control: 4-button control menu with display
- Connection: DMX: 3-pin & 5-pin In/Out
- Power Draw: 118W
- Multi-Voltage Operation: 100-240V 50Hz/60Hz (Auto Sensing)
- Dimensions (LxWxH): 7"x8"x9.25"/174x204x235mm
- Weight: 6lbs/ 2.6kg.

CODE: 1226100349

MOD 100 KIT PEARL

White Housing Kit for MOD 100 Series LED PARs :

MOD HEX100
MOD QW100
MOD TW100

CODE: 1226100354



MOD QA60

SPECIFICATION

- Light Source: 4 x 15W RGBW LED
- Beam Angle: 17-degrees
- Total Lumens: <750
- LUX: 3026 @ 3M (9.8 ft.)
- Power Input & Output: PowerCON
- DMX: 3-pin & 5-pin In/Out
- Dimming: Electronic 0 - 100%
- Channel Modes: Control Channels: 4, 5, 6, 9 or 10
- Operational Modes: 6 Operational Modes
- Control: 4-button control menu with display
- Connection: DMX: 3-pin & 5-pin In/Out
- Power Draw: 60W
- Multi-Voltage Operation: 00-240V 50Hz/60Hz (Auto Sensing)
- Dimensions (LxWxH): 7"x8"x9.25"/174x204x235mm
- Weight: 6lbs/ 2.6kg.

CODE: 1226100350

MOD 60 KIT PEARL

White Housing Kit for MOD 60 Series LED PARs :

MOD QA60

CODE: 1226100352



RGBAW COLOR MIXING + UV:



MOD BARN DOORS BLK/WHT

Black Barn Doors for MOD Series LED PARs/ White Barn Doors for Mod Kit Pearl

MOD BARN DOORS BLK CODE: 1226100355
MOD BARN DOORS WHT CODE: 1226100356



RGBA COLOR MIXING:



MOD BARN DOORS BLK/WHT

Black Barn Doors for MOD Series LED PARs/ White Barn Doors for Mod Kit Pearl

MOD BARN DOORS BLK CODE: 1226100355
MOD BARN DOORS WHT CODE: 1226100356



MOD QW100

SPECIFICATION

- Light Source: 7 x 15W RGBW LED
- Beam Angle: 17-degrees
- Total Lumens: <2300
- LUX: 3887 @ 3M (9.8 ft.)
- Power Input & Output: PowerCON
- DMX: 3-pin & 5-pin In/Out
- Dimming: Electronic 0 - 100%
- Channel Modes: Control Channels: 4, 5, 6, 9 or 10
- Operational Modes: 6 Operational Modes
- Control: 4-button control menu with display
- Connection: DMX: 3-pin & 5-pin In/Out
- Power Draw: 105W
- Multi-Voltage Operation: 00-240V 50Hz/60Hz (Auto Sensing)
- Dimensions (LxWxH): 7"x8"x9.25"/174x204x235mm
- Weight: 6lbs/2.7kg.

CODE: 1226100348



MOD 100 KIT PEARL

White Housing Kit for MOD 100 Series LED PARs :

MOD HEX100

MOD QW100

MOD TW100

CODE: 1226100354



MOD BARN DOORS BLK/WHT

Black Barn Doors for MOD Series LED PARs/ White Barn Doors for Mod Kit Pearl

MOD BARN DOORS BLK CODE: 1226100355

MOD BARN DOORS WHT CODE: 1226100356



MOD TW100

SPECIFICATION

- Light Source: 7 x 15W CW, WW, WWA
- Beam Angle: 17-degrees
- Total Lumens: <2400
- LUX: 2973 @ 3M (9.8 ft.)
- Power Input & Output: PowerCON
- DMX: 3-pin & 5-pin In/Out
- Dimming: Electronic 0 - 100%
- Channel Modes: Control Channels: 6, 8, 11 or 12
- Operational Modes: 6 Operational Modes
- Control: 4-button control menu with display
- Connection: DMX: 3-pin & 5-pin In/Out
- Power Draw: 111W
- Multi-Voltage Operation: 100-240V 50Hz/60Hz (Auto Sensing)
- Dimensions (LxWxH): 7"x8"x9.25"/174x204x235mm
- Weight: 6lbs/ 2.6kg

CODE: 1226100351



MOD 100 KIT PEARL

White Housing Kit for MOD 100 Series LED PARs :

MOD HEX100

MOD QW100

MOD TW100

CODE: 1226100354



MOD BARN DOORS BLK/WHT

Black Barn Doors for MOD Series LED PARs/ White Barn Doors for Mod Kit Pearl

MOD BARN DOORS BLK CODE: 1226100355

MOD BARN DOORS WHT CODE: 1226100356



ELEMENT QA IP

SPECIFICATION

- Light Source: 6 x 5W RGBA LEDs
- Beam Angle: 20 degree
- LUX: 901 @ 2M; 213 @ 4M
- Electronic Dimming: 0 - 100%
- 5 Channel Modes: 4/5/6/9/10
- 5 Operational Modes: RGBA Dimmer Mode; Sound Active mode; Auto Run Mode (16 Color change modes, 16 Color fade modes, & 1 Color/fade combo mode); Static Color mode; and DMX Controlled
- Control: 4-button DMX menu display on rear panel with water resistant hatch
- Connection: DMX: WiFLY EXR Wireless DMX, IEC connection to power/charge fixture
- Battery Type: fixed lithium battery
- Battery Charge Time: 4 Hours (With Load Turned OFF & Power Switch ON)
- Battery Life: 7,5 hours (single color)
- Power Draw: 45W
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- Dimensions (LxWxH): 5.51"x5.51"x7.55"/140x140x192mm
- Weight: 6.5lbs/ 2.9kg.

CODE: 1226100337

RGBA COLOR MIXING:



ELEMENT HEX IP /PEARL

SPECIFICATION

- Light Source: 4 x 10W RGBAW + UV LEDs
- Beam Angle: 20 degree
- LUX: 684 @ 2M; 171 @ 4M
- Electronic Dimming: 0 - 100%
- 5 DMX Channel Modes: 6/7/8/11/12
- 5 Operational Modes: RGBAW+UV Dimmer Mode; Sound Active mode; Auto Run Mode (16 Color change modes, 16 Color fade modes, & 1 Color/fade combo mode); Static Color mode; and DMX Controlled
- Control: 4-button DMX menu display on rear panel with water resistant hatch
- Connection: DMX: WiFLY EXR Wireless DMX IEC connection to power/charge fixture
- Battery Type: fixed lithium battery
- Battery Charge Time: 4 Hours (With Load Turned OFF & Power Switch ON)
- Battery Life: 9 hours (single color)
- Power Draw: 45W
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- Dimensions (LxWxH): 5.51"x5.51"x7.55"/140x140x192mm
- Weight: 6.5lbs/ 2.9kg.

ELEMENT HEX IP CODE: 1226100340

ELEMENT HEX IP PEARL CODE: 1226100347

RGBAW COLOR MIXING + UV:



NEW!

32 HEX IP PANEL/ PEARL

The ADJ 32 HEX Panel IP is an IP65 rated multi-functional wash / blinder / color strobe fixture for indoor or outdoor use. It features 32x 12W HEX LEDs (6-IN-1 – RGBWA+UV), 8 individually controlled sections with Pixel Zone Control and a 24-degree beam angle. With an all metal, black housing and IP65 outdoor rating, its protected from elements - dust, sand, moisture and liquids. It includes a magnetic removable filter frame to add a diffusion filter to change the beam angle.

On the rear panel it features IP65 5-pin DMX In/Out connections, and Seetronic powerCON IP65 In/Out connections to daisy chain the power. Both the DMX and powerCON connections are fitted with rubber protective covers. An OLED display with touch buttons helps to easily navigate the functions of the fixture.

The 32 HEX Panel IP is flicker free for film and broadcast, and has multiple DMX control modes, dimmer curve modes, and selectable gamma and LED refresh rate settings.



SPECIFICATION

- Light Source: 32 x 12W RGBWA + UV LEDs (50,000 hrs)
- Beam Angle: 24-degrees
- IP65 rated – protects from dust, sand, moisture, water
- All metal construction – black housing
- Includes heavy duty bracket
- Includes magnetic removable filter frame with diffusion filter
- Flicker free for film and broadcast
- Fits standard 108mm omega bracket (not included, available from ADJ as spare part 9900003792)
- Display: OLED display with function buttons
- Data In/Out: 5-pin DMX IP65 (with rubber protective covers over connections)
- Power In/Out: Seetronic powerCON IP65 (with rubber protective covers over connections)
- DMX Channel Modes: Multiple DMX channel modes
- 8 individually controlled sections with Pixel Zone Control
- 0-100% Dimming + smooth 16-bit Dimming
- 5 Dimming Curve Modes
- Control Mode: DMX512, RDM
- Gamma Brightness: Multiple settings
- LED Refresh Rate: Multiple settings
- Power voltage: AC100-240V, 50/60Hz (Multi-voltage)
- Power Draw: 298W
- Dimension: 14"x 9" x 6.5" / 354x225,5x165,5mm
- Weight: 24.25lbs/ 11kg.

CODE: 1237000203

RGBAW COLOR MIXING + UV:



18P HEX IP

SPECIFICATION

- Light Source: 18 x 12W RGBAW + UV LEDs (50,000 hrs)
- IP65 Outdoor Rated
- 5 Operational modes: Static Color Mode, RGBAW & UV Dimmer Mode, Program Mode, Sound Active Mode and DMX Controlled
- 4 DMX Channel Modes: 6/7/8/12
- 63 built-in Color Macros
- Flicker Free operation (No flickering on camera)
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- LED pulse and strobe effect
- Electronic Dimming: 0 - 100%
- Beam angle: 30-degree
- 4-button, DMX digital display on rear panel
- Data: Linkable via 3-pin XLR cables
- Connection: Outdoor powerCON TRUE 1 In/Out
- Daisy chain: 13 units (120V); 15 units (220V)
- Supports RDM (Remote Device Management)
- Scissor Yoke & safety eye
- Dimensions (LxWxH): 13.25"x9.25"x11" / 336x233x279mm
- Weight: 15lbs/ 6.8kg.

CODE: 1226100362



RGBAW COLOR MIXING + UV:



12P HEX IP

SPECIFICATION

- Light Source: 12 x 12W RGBAW + UV LEDs (50,000 hrs)
- IP65 Outdoor Rated
- 5 Operational modes: Static Color Mode, RGBAW & UV Dimmer Mode, Program Mode, Sound Active Mode and DMX Controlled
- 4 DMX Modes: 6/7/8/12
- 63 built-in Color Macros
- Flicker Free operation (No flickering on camera)
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- LED pulse and strobe effect
- Electronic Dimming: 0 - 100%
- Beam angle: 30-degree
- 4-button, DMX digital display on rear panel
- Data linkable via 3-pin XLR cables
- Connection: Outdoor powerCON TRUE 1 In/Out
- Daisy chain: 13 units (120V); 20 units (220V)
- Supports RDM (Remote Device Management)
- Scissor Yoke & safety eye
- Dimensions (LxWxH): 11.75"x7.85"x10.5"/298x199.5x264mm
- Weight: 10.5lbs/ 4.7kg.

CODE: 1226100361



RGBAW COLOR MIXING + UV:



7P HEX IP

SPECIFICATION

- Light Source: 7 x 12W RGBAW + UV LEDs (50,000 hrs)
- IP65 Outdoor Rated
- 5 Operational modes: Static Color Mode, RGBAW & UV Dimmer Mode, Program Mode, Sound Active Mode and DMX Controlled
- 4 DMX Modes: 6/7/8/12
- 63 built-in Color Macros
- Flicker Free operation (No flickering on camera)
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- LED pulse and strobe effect
- Electronic Dimming: 0 - 100%
- Beam angle: 30-degree
- 4-button, DMX digital display on rear panel
- Data linkable via 3-pin XLR cables
- Connection: Outdoor powerCON TRUE 1 In/Out
- Daisy chain: 20 units (120V); 37 units (220V)
- Supports RDM (Remote Device Management)
- Scissor Yoke & safety eye
- Dimensions (LxWxH): 10"x6.5"x 9.25"/256x161.7x232.5mm
- Weight: 7.5 lbs / 3.3 kg.

CODE: 1226100360



RGBAW COLOR MIXING + UV:



7PZ IP

SPECIFICATION

- Light Source: 7 x 15W RGBW LEDs (50,000 hrs)
- IP65 Outdoor Rated
- Colors: 64 built-in Color Macros
- 5 Operational Modes: RGBW Dimmer Mode; Auto Run; Color Fade; Static Color Mode; and DMX Controlled
- 4 DMX Channel Modes: 5/7/8/12
- Beam Angle: Variable beam angle (7 - 45-degrees)
- Electronic Dimming: 0 - 100%
- Control: 4-button DMX menu display on rear panel
- Connection: Linkable via 3-pin IP cable (In/Out)
- Daisy chain: PowerCON TRUE1 AC IN/OUT outlets on rear to Daisy chain power (up to 15 units)
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- Power Draw: 128W
- Dimensions: 10.5"x13.75"x15"/270x350x380mm
- Weight: 25lbs/ 11kg.


CODE: 1226100332



RGBW COLOR MIXING:



PHOTOMETRICS

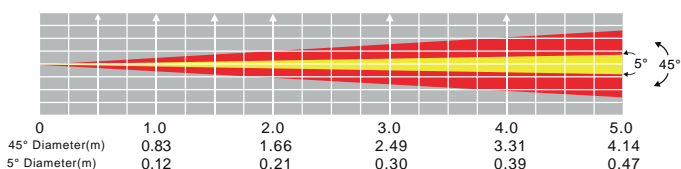


WiFLY EXR QA5 IP

SPECIFICATION

- Light Source: 5 x 5W RGBA LEDs (50,000 hrs)
- Colors: 16 Color Change Modes, 16 Color Fade Modes, 64 built-in Color Macros
- 6 Operational Modes: Static Color; RGBA Dimmer Mode; Color Change; Color Fade; Auto Run (Program Run); and DMX Controlled
- 5 DMX Channel Modes: 4/5/6/10/11
- Beam Angle: 25-degree
- Electronic Dimming: 0 - 100%
- Control: 4-button DMX menu display on rear panel
- Connection: Linkable via 3-pin IP cable (In/Out)
- Daisy chain: 4-Pin Power AC IN/OUT outlets on rear to Daisy chain power (up to 11 units)
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- Power Draw: 50W
- Battery Life: 5 Hours Full On, 10 Hours in Energy Save Mode (With Full Charge)
- Dimensions (LxWxH): 12.25"x11"x7.5"/310x280x194mm
- Weight: 12lbs/ 5.48kg.


CODE: 1226100292

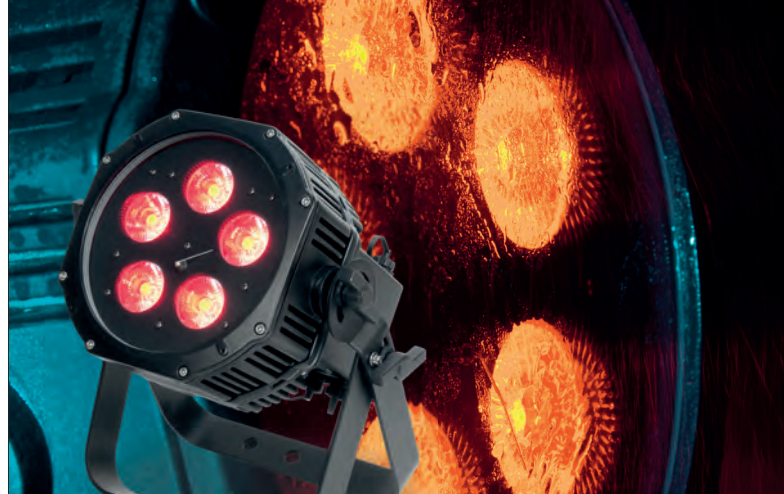

Compatible with
ADJ RFC
(Sold Separately)
1223200026

PHOTOMETRICS

R	D25	1596	676	362	170	130	(LUX)
G	D25	2130	685	329	177	117.3	
B	D25	2210	641	277	121.7	78.4	
A	D25	2170	633	399	170	106.9	
RGBA	D25	8200	2480	1078	554	357	



RGBA COLOR MIXING:




WiFLY EXR HEX5 IP

SPECIFICATION

- Light Source: 5 x 10W RGBAW + UV LEDs (50,000 hrs)
- Colors: 16 Color Change Modes, 16 Color Fade Modes, 63 built-in Color Macros
- 6 Operational Modes: Static Color; RGBWA+UV Dimmer Mode; Color Change; Color Fade; Auto Run (Program Run); and DMX Controlled
- 5 DMX Channel Modes: 6/7/8/11/12
- Beam Angle: 40-degree
- Electronic Dimming: 0 - 100%
- Control: 4-button DMX menu display on rear panel
- Connection: Linkable via 3-pin IP cable (In/Out)
- Daisy chain: 4-Pin Power AC IN/OUT outlets on rear to Daisy chain power (up to 10 units)
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- Power Draw: 56W
- Battery Life: 5 Hours Full On, 8 Hours in Energy Save Mode (With Full Charge)
- Dimensions (LxWxH): 10.5"x9.5"x6.5"/310x280x194mm
- Weight: 12lbs/ 5.48kg.


CODE: 1226100293

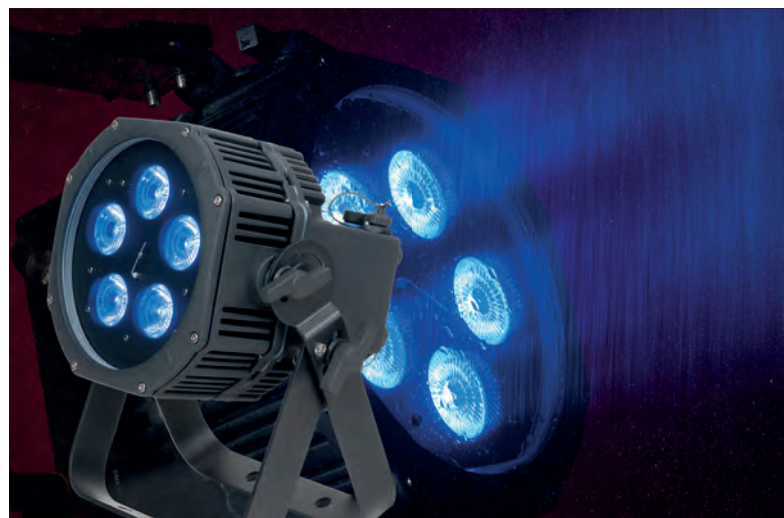

Compatible with
ADJ RFC
(Sold Separately)
1223200026

PHOTOMETRICS

R	D40	971	237	97.8	48.9	32.1	(LUX)
G	D40	951	257	108.5	55.7	37.5	
B	D40	815	217	85	53.1	31.7	
W	D40	1190	302	113.8	67.6	42.3	
A	D40	574	140	50.6	28.9	17.6	
UV	D40	179	47.7	18.3	10.9	6.5	
RGBAWUV	D40	4240	966	449	241	154.5	



RGBAW COLOR MIXING + UV:



WiFLY EXR QAI2BAR IP

SPECIFICATION

- Light Source: 12 x 5W RGBA LEDs (50,000 hrs)
- Operational Modes: Color Change; Color Jumping; Color Dreaming; Auto (Program Run); WiFLY and DMX Controlled
- 7 DMX Channel Modes: 4/6/7/8/9/12/14
- Beam Angle: 25-degree
- Electronic Dimming: 0 - 100%
- Control: 4-button DMX Menu display on rear
- Connection: Linkable via 3-pin IP cable (In/Out)
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- Power Draw: 75W
- Dimensions (LxWxH): 40.5"x5.5"x6"/1030x140x155mm
- Weight: 14.11lbs/ 6.4kg.

CODE: 1226100294


RGBA COLOR MIXING:



Compatible with
ADJ RFC
(Sold Separately)
1223200026

PHOTOMETRICS

R	D25	1676	925	557	373	252	(LUX)
G	D25	1581	806	466	291	197	
B	D25	1880	827	441	293	200	
A	D25	871	544	264	160	101	
RGBA	D25	5120	2350	1435	874	496	




MEGA TRI BAR

SPECIFICATION

- Light Source: 18 x 3W RGB LEDs
- 4 Operational Modes: DMX-512, Master/Slave, Stand Alone and Sound Active
- 7 DMX Channel modes: 2/3/4/6/7/12/54
- Beam angle: 40 degrees
- Electronic Dimming: 0 - 100%
- Control: On-board, 4-button LED DMX display/menu
- Connection: Linkable via 3-pin XLR input & output
- Multi-Voltage Operation: 90-240V AC, 50/60Hz
- Power Draw: 102W
- Dimensions (LxWxH): 43.3"x3.14"x4.56"/1100x80x116mm
- Weight: 13.2lbs/ 6kgs.

CODE: 1226200017

RGB COLOR MIXING:

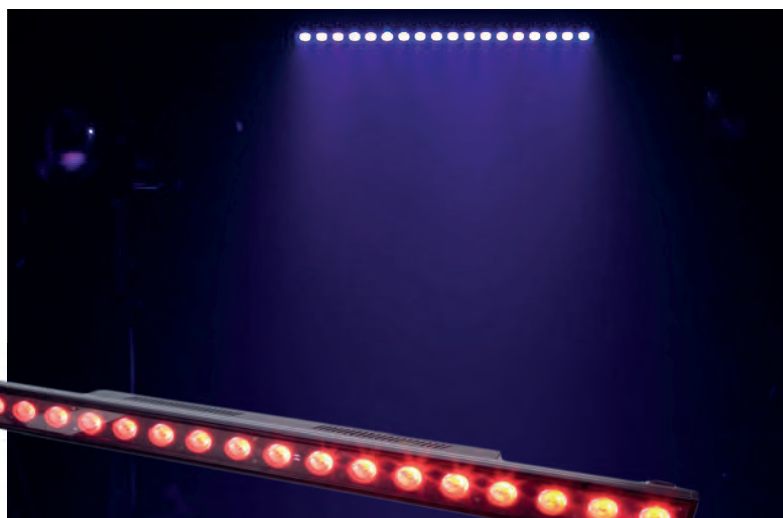

ULTRA HEX BAR 12

SPECIFICATION

- Light Source: 12 x 10W RGBAW + UV LEDs (50,000 hrs)
- 6 Operational Modes: Auto Run, Program Mode, Sound Active, RGBAW + UV Dimmer, Static Color and DMX-512 Mode
- 5 DMX Channel Modes: 6/7/8/12/36
- Beam Angle: 40 degrees
- 63 built-in Color Macros
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- Power Draw: 90W
- Linkable: DMX via 3-pin XLR cable; Power via IEC daisy-chain power link 7 Fixtures Max
- Multi-Voltage Operation: AC 100V-240V 50/60Hz
- Dimensions (LxWxH): 40.25"x2.75"x4.75"/1020x70x122mm
- Weight: 11lbs/ 4.74Kgs.

CODE: 1226200047

RGBAW COLOR MIXING + UV:



"Quick Align"
Magnetic
Ends




Compatible with
ADJ RFC
(Sold Separately)
1223200026



PHOTOMETRICS

R	D40	823	335	176	103.9	65.6	(LUX)
G	D40	968	338	183	104.8	64.7	
B	D40	874	328	168	95.8	60.8	
W	D40	1303	552	269	148	96.8	
A	D40	529	201	95.7	53.9	35.4	
UV	D40	192	80.2	39.2	22.4	14.8	
RGBAWUV	D40	3880	1680	810	478	286	



ULTRA HEX BAR 6

SPECIFICATION

- Light Source: 6 x 10W RGBAW + UV LEDs (50,000 hrs)
- Color mixing LEDs
- 6 Operational Modes: Auto Run, Program Mode, Sound Active, RGBAW + UV Dimmer, Static Color and DMX-512 Mode
- 5 DMX Channel Modes: 6/7/8/12/18
- Beam Angle: 40 degrees
- 63 built-in Color Macros
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- Power Draw: 55W
- Linkable: DMX via 3-pin XLR cable; Power via IEC daisy-chain power link (Up to 12 Ultra Hex Bar 6 fixtures)
- Multi-Voltage Operation: AC 100V-240V 50/60Hz
- Dimensions (LxWxH): 23"x4.5"x6.5"/585x110x165mm
- Weight: 6lbs/ 2.82kg.

CODE: 1226200044

RGBAW COLOR MIXING + UV:




"Quick Align"
Magnetic
Ends



PHOTOMETRICS

R	D40	794	248	91.3	55.5	34.8	(LUX)
G	D40	868	282	110.7	62.7	39.6	
B	D40	827	259	91.5	56	35.4	
W	D40	1185	396	174.7	87.3	63.3	
A	D40	466	143.2	63.8	37.3	24.3	
UV	D40	147.6	48.8	21.6	12.4	8	
RGBAWUV	D40	3710	1172	566	310	188.4	



DOTZ PAR 100


SPECIFICATION

- Light Source: 1 x 100W COB TRI LED (50,000 hrs)
- 5 Operational Modes: Auto Run, Sound Active, Color Macro, Dimmer, and DMX Controlled Mode
- 4 DMX Channel Modes: 3/4/5/9
- Beam Angle: 80-degrees (25-degrees with supplied lens kit)
- Electronic Dimming: 0 - 100%
- Control: 4-button LCD DMX display on rear panel
- Connection: 3-pin XLR chassis mount connectors for DMX linking
- Daisy chain: IEC AC IN/OUT to Daisy chain power (up to 9 Dotz Par 100's @ 110V and 19 Dotz Par 100's @ 230V)
- Power Draw: 115W
- Multi-Voltage Operation: 100V-240V 50Hz/60Hz
- Dimensions (LxWxH): 8"x4.75"x8"/201x120x201mm (w/o Bracket) or 10"x5"x11.25"/255x130x284mm (With Bracket)
- Weight: 6.8lbs/ 3.1Kgs.


CODE: 1223200038



PHOTOMETRIC LENS ON

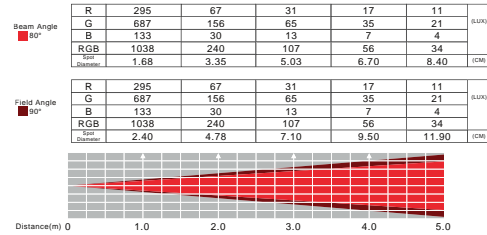

PHOTOMETRIC LENS OFF

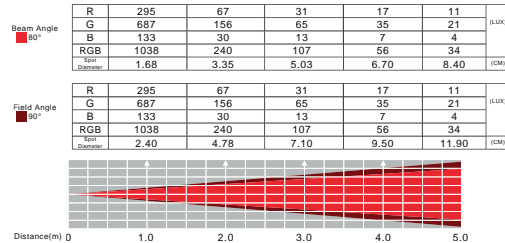

DOTZ MATRIX


SPECIFICATION

- Light Source: 16 x 30W COB RGB LEDs
- 4 Operational Modes: DMX, Manual RGB Mode, Static Color & Sound Active
- 5 DMX Channel Modes: 3/6/7/48/52;
- Beam Angle: 60 degrees for wide coverage
- Electronic Dimming: 0 - 100%
- Built-In preset Colors and programs
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- Connection: 3 & 5 Pin In/Out
- PowerCON AC IN/OUT; Daisy chain up to 5 units @120V, 9 units @220V
- Power Draw: 430W Max; 3.91A @120V, 1.95A @220V
- Multi-Voltage Operation: 100-240V, 50Hz/60Hz (auto sensing)
- Dimensions (LxWxH): 13.75"x6.75"x14.75"/ 345x170x370mm
- Weight: 18lbs/ 7.8kg.

CODE: 1215200023



PHOTOMETRICS

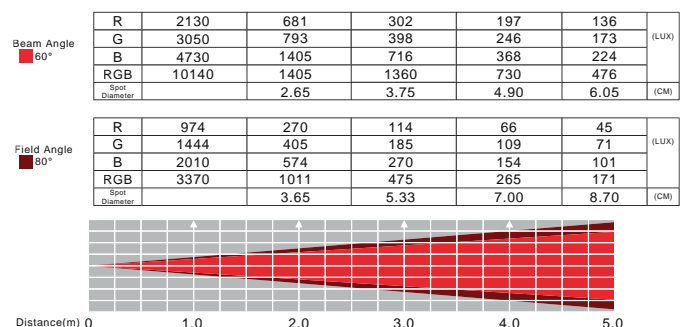

RGB COLOR MIXING:



I8P HEX

SPECIFICATION

- Light Source: 18 x 12W RGBAW + UV LED (50,000 hrs)
- Beam Angle: 25 degree
- 5 Operational Modes: Manual Color; Color Fade; Auto Program; Sound Active, and DMX modes
- 4 DMX Channel Modes: 6/7/8/12
- Electronic Dimming: 0 - 100%
- Control: 4-button Digital Display for easy navigation
- Connection: 3-pin DMX, PowerCON IN
- Daisy chain: 4 Fixtures Max. (120V) 8 Fixtures Max. (240V)
- Power Draw: 154W
- Multi-Voltage Operation: 100-240V 50Hz/60Hz (Auto Sensing)
- Dimensions (LxWxH): 12"x6.75"x13.5"/300x170x340mm
- Weight: 12 lbs/ 5.9kg.

CODE: 1226100333



ADJ RFC
(Sold Separately)
1223200026

RGBAW COLOR MIXING + UV:



I2PX HEX/PEARL

SPECIFICATION

- Light Source: 12x12W RGBAW + UV LEDs (50,000 hrs)
- Beam Angle: 30-degree
- 5 Operational Modes: Static Color Mode, RGBAW & UV Dimmer Mode, Program Mode, Sound Active Mode and DMX Modes
- 4 DMX Channel Modes: 6/7/8/12
- Electronic Dimming: 0 - 100%
- Control: 4-button, DMX digital display on rear panel
- Connection: 3-pin DMX In/Out
- Daisy chain: 6 Fixtures Max. (120V) 13 Fixtures Max. (240V)
- Power Draw: 150W
- Multi-Voltage Operation: AC 110-250V, 50/60Hz (PowerCON In/Out)
- Dimensions (LxWxH): 11.75"x10"x5.5"/298x249x136mm
- Weight: 9lbs/ 3.9kgs.

I2PX HEX CODE: 1226100365

I2PX HEX PEARL: 1226100366




RGBAW COLOR MIXING + UV:



PHOTOMETRICS

R	1024	312	150	85	55	(LUX)
G	2180	641	305	172	112	
B	2990	305	376	217	135	
W	3620	810	428	247	162	
A	1195	961	179	104	70	
UV	442	384	63	36	26	
RGBAWUV	10890	2770	1330	733	455	



SABER SPOT WW

SPECIFICATION

- Light Source: 1 x 15W WW LED (10,000 hrs)
- Beam Angle: 4 degrees
- Includes 2 Interchangeable frost filter lenses (10 & 45 Degree)
- Refresh Rate: 3.6KHz
- Flicker Free
- Electronic Dimming: 0-100%
- 3 DMX Channel Modes: 1/2/4
- Connection: 3-pin XLR In/out pigtailed
- PowerCON In/Out
- Multi-Voltage Operation: AC 100-240V, 47/63Hz
- 36 Fixtures Max @ 110V, 65 Fixtures Max @ 240V
- Dimensions (LxWxH): 3.5"x6.75"x3.5"/88x170x87mm
- Weight: 2.6lbs/ 1.2kg

CODE: 1226100330



SABER SPOT RGBW



SPECIFICATION

- Light Source: 1 x 15W RGBW LED (10,000 hrs)
- Beam Angle: 4 degrees
- Includes 2 Interchangeable frost filter lenses (10 & 45 Degree)
- Refresh Rate: 3.6KHz
- Flicker Free
- Electronic Dimming: 0-100%
- 12 DMX Channel Modes: 3/4/4/5/6/6/7/8/8/9/11/12
- Connection: 3-pin XLR In/out pigtailed
- PowerCON In/Out
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- 38 Fixtures Max @ 110V, 68 Fixtures Max @ 240V
- Dimensions (LxWxH): 3.5"x6.75"x3.5"/88x170x87mm
- Weight: 2.6lbs/ 1.2kg

CODE: 1226100331



RGBW COLOR MIXING:





SABER SPOT DTW

SPECIFICATION

- Light Source: 1 x 15W WW LED (10,000 hrs)
- Dim to warm effect with Amber LED
- Color Temperature: (Full on): 3100K WW, 1900K Amber
- Beam Angle: 20 degrees
- Includes 2 Interchangeable frost filter lenses (10 & 45 Degree)
- Refresh Rate: 3.6KHz
- Flicker Free
- Electronic Dimming: 0-100%
- 3 DMX Channel Modes: 1/2/4
- Connection: 3-pin XLR In/out pigtailed
- PowerCON In/Out
- Multi-Voltage Operation: AC 100-240V, 47/63Hz
- 33 Fixtures Max @ 110V, 71 Fixtures Max @ 240V
- Dimensions (LxWxH): 3.5"x6.75"x3.5"/88x170x87mm
- Weight: 2.6lbs/ 1.2kg

CODE: 1226100353

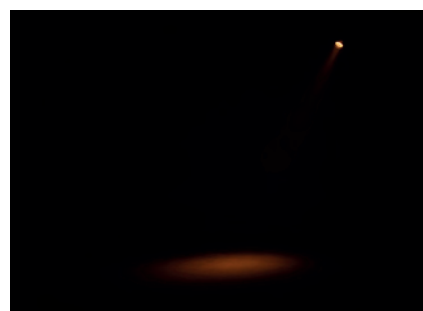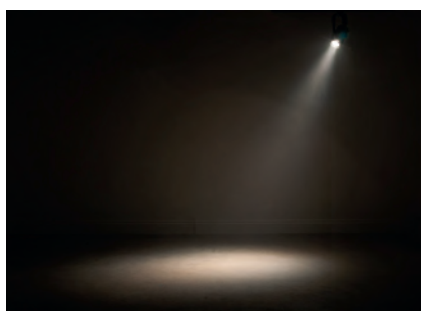


SABER SPOT GO

SPECIFICATION

- Light Source: 1 x 15W RGBW LED (10,000 hrs)
- Beam Angle: 4 degrees
- Includes 2 Interchangeable frost filter lenses (10 & 45 Degree)
- Refresh Rate: 3.6KHz
- Flicker Free
- Electronic Dimming: 0-100%
- 12 DMX Channel Modes: 3/4/4/5/6/6/7/8/8/9/11/12
- WiFLY EXR wireless DMX built-in (wireless DMX up to 2500 ft/700m)
- Rechargeable Lithium Battery
- Running Time Mode: 2hrs / 4hrs / 6hrs / 8hrs
- Power supply: DC 13-16V
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- Dimensions (LxWxH): 3.5"x6.75"x3.5"/88x170x87mm
- Weight: 3lbs/ 1.4kg.

CODE: 1226100369

RGBW COLOR MIXING:





PAR Z100 5K

The Par Z100 5K is a modern LED twist to the traditional halogen Par Can. It is powered by a potent 100W cold white C.O.B. (Chip On Board) LED with a color temperature of 5700K. Its output is comparable to a 1000W halogen sealed beam Par. It is equipped with 5 different beam angle options that may be changed by hand. powerCON In/Out allows for the fixture to be daisy chained, while 5-pin DMX control offers a variable strobe rate and 5 different dimming curve options.

The Par Z100 5K allows lighting and stage designers the look of the traditional stage par with the technological conveniences of modern day lighting. The advantages include low power draw, fixture and performers won't get hot on stage, DMX control of dimming and strobe. There are no dimmer packs needed anymore. The fixture comes with a gel frame in which diffusion filters may be inserted to further change the beam angle.



SPECIFICATION

- Light Source: 1 x 100W COB LED Cool White (50,000 hrs)
- LUX: 7874 (9°); 4900 (15°); 2467 (20°); 1397 (25°); 896 (30°)
- CRI: 90
- Color temperature: 5700K
- Beam Angle: 9, 15, 20, 25 Or 30-degree (manual adjustment)
- Dimming: 0 - 100% with 5 dimming curves
- Zoom: Manual
- 3 DMX Channel Modes : 1/2/3
- Control: 4-button DMX menu display on rear panel
- Connection: DMX: 5-pin DMX In/Out
- Daisy chain: 15 fixtures (120V); 25 fixtures (230V)
- Power Draw: 115W
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- Dimensions (LxWxH): 19.5"x11"x9"/491x275x224mm (with Bracket)
- Weight: 7.5lbs/ 3.4kg.

CODE: 1226100343


9° Beam Angle



15° Beam Angle



20° Beam Angle



25° Beam Angle



30° Beam Angle



PAR Z100 3K/ PAR ZPI00 3K

SPECIFICATION

- Light Source: 1 x 100W COB LED Warm White
- LUX: 7135 (9°); 4440 (15°); 2236 (20°); 1266 (25°); 812 (30°)
- CRI: 91.8
- Color temperature: 3000K
- Beam Angle: 9, 15, 20, 25 Or 30-degree (manual adjustment)
- Dimming: 0 - 100% with 5 dimming curves
- Zoom: Manual
- 3 DMX Channel Modes : 1/2/3
- Control: 4-button LCD menu
- Connection: DMX: 5-pin DMX In/Out
- Daisy chain: 15 fixtures (120V); 25 fixtures (230V)
- Power Draw: 115W
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- Dimensions (LxWxH): 19.5"x11"x9"/491x275x224mm (with Bracket)
- Weight: 7.5lbs/ 3.4kg.

CODE: 1226100342
CODE: 1226100346



PAR Z120 RGBW/ PAR ZPI20 RGBW

SPECIFICATION

- Light Source: 1 x 115W Quad RGBW LED (50,000 hrs)
- Beam angle: 7, 11.5, 16, 20.5 or 25-degree (manual adjustment)
- PWM frequency: 1200Hz
- DMX: 5-pin DMX In/Out
- PowerCon In/Out or daisy chain fixture
- Control protocol: DMX-512
- 6 DMX Channel Modes: 4/5/6/7/8/9
- 4-button DMX menu display on rear panel
- Adjustable latch to manually change beam angle
- Includes gel frame for diffusion filters (Diffusion filter sold separately)
- Strobe effect
- Flicker Free Operation
- Electronic Dimming: 0 - 100% with 5 dimming curves
- Run all night – No duty cycle
- Multi-voltage operation: AC 100-240V, 50/60Hz
- Dimensions (LxWxH): 19.5"x11"x9" /491x275x224mm (with Bracket)
- Weight: 7.5lbs/ 3.9kg.

CODE: 1226100357
CODE: 1226100358



ENCORE BURST 100IP

NEW!

SPECIFICATION

- Light Source: 1 x 125W WW COB CREE LED
- Color Temperature: 2700K (1200K dim to warm mode)
- Beam angle: 50-degree
- Includes magnetic holder to easily attach a diffusion filter
- Display: OLED display with 4-button touch menu
- Data In/Out: 5-pin DMX IP65 (with rubber protective covers over connections)
- Power In/Out: powerCON IP65 (with rubber protective covers over connections)
- All metal construction
- Scissor yoke
- Compact design
- Safety loop on rear
- Power voltage: AC100-240V, 50/60Hz (Multi-voltage)
- Protection Rating: IP65 (outdoor protection from dust, sand, moisture & liquid)

Preliminary information – More info coming soon

CODE: 1226100367



ENCORE FR20 DTW

SPECIFICATION

- Light Source: 1 x 17W WW LED (50,000 hrs)
- CRI: 92
- LUX @ 3M: 600
- Color temperature: 3000K
- Beam Angle: 19 degrees
- Dimming Potentiometer: 0-100%
- Triac Dimmable: Compatible with ADJ Dimmer Packs
- Control: 4-button LCD menu
- Includes barn doors, hanging bracket and 45° lens kit
- Multi-voltage operation: AC 100-240V, 50/60Hz
- Dimensions (LxWxH): 10.25" x 5.25" x 8.25" / 259x133x210mm
- Weight: 5lbs/ 2 kg.

CODE: 1237000189



ENCORE FR150z

SPECIFICATION

- Light Source: 1 x 130W LED
- CRI: 95.9
- Color temperature: 3000K
- Beam Angle: 8-50 degrees
- Dimming: 16-bit Dimming 0-100%
- Zoom: Manual Zoom control: 8-50 degree
- Channel Modes: 4 DMX modes: 1/2/3/4
- Control: 4-button LCD menu
- Connection: 3-pin & 5-pin DMX In/out
- Daisy chain: PowerCON In/Out to Daisy chain power -7 Fixtures Max. @ 120V 14 Fixtures Max. @ 230V
- Power Draw: 150W
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- Dimensions (LxWxH): W/ Barn Doors: 16.62"x11.76"x-16.38"/422.23x298.62x 416mm
W/o Barn Doors:10.87"x11.76"x16.38"/276x298.62x416mm
- Weight: 16.5lbs/ 7.4kgs (w/ Barn Door)
15.1lbs/ 6.8kgs (w/o Barn Door)

CODE: 1237000174



ENCORE FR50z

SPECIFICATION

- Light Source: 1 x 50W LED
- CRI: 96.9
- Color temperature: 3000K
- Beam Angle: 8-50 degrees
- Dimming: 16-bit Dimming 0-100%
- Zoom: Manual Zoom control: 8-50 degree
- Channel Modes: 4 DMX modes: 1/2/3/4
- Control: 4-button LCD menu
- Connection: 3-pin DMX In/out
- Daisy chain: PowerCON In/Out to Daisy chain power -20 Fixtures Max. @ 120V 40 Fixtures Max. @ 230V
- Power Draw: 50W
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- Dimensions (LxWxH): W/ Barn Doors: 13.38"x 9.37"x11.74"/339.8 x 238.05 x 298.25mm
W/o Barn Doors: 9.17"x9.37"x11.74"/232.8x238.05x298.25mm
- Weight: 9.5lbs/ 4.3kgs (w/ Barn Door)
8.5lbs/ 3.8kgs (w/o Barn Door)

CODE: 1237000173



ENCORE PROFILE 1000 WW

SPECIFICATION

- Light Source: 1 x 120W WW COB LED
- Color temperature: 3000°K
- CRI: 98
- 4 Gobos included: (Size: 63.5mm; Visible 51.25mm, Thick 2mm)
- 2 Operating Modes: Dimmer Mode & DMX Controlled
- 3 DMX Channel Modes: 1/2/3
- Focus: Manual
- Zoom: Manual
- Dimming: 0-100%
- Beam Angle: 12 degree-30 degree
- Connection/Daisy chain: 3 and 5 Pin DMX, Power-Con In and Out for Daisy chaining (Connect up to 5 Fixtures)
- Power Draw: 144W
- Multi-Voltage Operation: AC 100-240V 50/60Hz (non switchable)
- Dimensions (LxWxH): 22"x9.75"x15.25"/560x250x385mm
- Weight: 19lbs/ 8.5kgs.

CODE: 1237000134




UC-IR
(Sold Separately)
1321000074



PHOTOMETRICS

	0.5m	1m	2m	3m	4m	5m	Diameter (feet)
12°	0.11	0.22	0.44	0.66	0.88	1.10	(LUX)
WW	94800	30700	5970	2640	1514	958	

	0.5m	1m	2m	3m	4m	5m	Diameter (feet)
30°	0.25	0.50	1.00	1.50	2.00	2.50	(LUX)
WW	39600	6760	1346	640	345	209	



ENCORE PROFILE 1000 COLOR

SPECIFICATION

- Light Source: 1 x 120W RGBW COB LED
- 4 Gobos included (Size: 63,5mm; Visible 51,25mm, Thick 2mm)
- 7 Operating Modes: RGBW Dimmer, Color Change, Color Fade, Auto Run, Static Color, Sound Active, & DMX Controlled
- 5 DMX Channel Modes: 4/5/6/10/11
- Focus: Manual
- Zoom: Manual
- Dimming: 0-100%
- Beam Angle: 12 degree-30 degree
- Connection/Daisy chain: 3 and 5 Pin DMX, Power-Con In and Out for Daisy chaining (Connect up to 5 Fixtures)
- Power Draw: 144W
- Multi-Voltage Operation: AC 100-240V 50/60Hz (non switchable)
- Dimensions (LxWxH): 22"x9.75"x15.25"/560x250x385mm
- Weight: 19lbs/ 8.5kgs.

CODE: 1237000135


RGBW COLOR MIXING:



PHOTOMETRICS

	0.5m	1m	2m	3m	4m	5m	Diameter (feet)
12°	0.11	0.22	0.44	0.66	0.88	1.10	(LUX)
R	26100	7640	1898	807	452	289	
G	21200	6230	1356	600	318	201	
B	22400	6340	1611	729	392	246	
W	9460	2900	773	338	186.3	111.5	
RGBW	81000	24000	4940	1822	1056	636	

	0.5m	1m	2m	3m	4m	5m	Diameter (feet)
30°	0.25	0.50	1.00	1.50	2.00	2.50	(LUX)
R	5660	1824	470	197.1	116	68.7	
G	4500	1202	344	147.1	77.3	50.4	
B	5240	1425	402	177.6	93.9	59.4	
W	2580	667	185	80.6	42.4	25.7	
RGBW	20200	4570	1160	506	268	175.3	



COB CANNON WASH ST/PEARL ST

SPECIFICATION

- Light Source: 1 x 150W COB RGBA LED
- Beam Angle: 80 Degrees (Optional 40° & 50° Lenses Included)
- Dimming: 0 - 100% with 5 dimming curves
- 7 DMX Channel Modes: 3/4/5/6/7/9/10
- Control: 4-button DMX menu display on rear panel
- Connection: DMX: 3-pin DMX In/Out
- Daisy chain: 5 Fixtures Max
- Power Draw: 132W
- Multi-Voltage Operation: 100V-240V/50-60Hz
- Dimensions (LxWxH): 13"x10"x7.5"/330x256x190mm (bracket); 8.75"x7.5"x7.5"/218.5x190x190mm (without bracket)
- Weight: 9lbs/ 4.1kgs

COB CANNON WASH CODE: 1223200050

COB CANNON WASH PEARL CODE: 1223200052



RGBA COLOR MIXING:



ADJ RFC
(Sold Separately)
1223200026

Includes 40° and 50° lens



COB CANNON WASH DW ST

SPECIFICATION

- Light Source: 1 x 150W COB LED
- Color: Warm White/Cool White
- Beam Angle: 80 Degrees (Optional 40° & 50° Lenses Included)
- Dimming: 0 - 100%
- 6 DMX Channel Modes: 1/2/3/4/5/6
- Control: 4-button DMX menu display on rear panel
- Connection: DMX: 5-pin DMX In/Out
- Daisy chain: 5 Fixtures Max
- Power Draw: 132W
- Multi-Voltage Operation: AC 100V/60Hz - 240V/50Hz
- Dimensions (LxWxH): 13"x10"x7.5"/330x256x190mm (bracket); 8.75"x7.5"x7.5"/218.5x190x190mm (without bracket)
- Weight: 9lbs/ 4.1kgs.

CODE: 1223200051



BARNDOR WH FOR COB CANNON WASH ST

SPECIFICATION

- Barndoor for COB Cannon Wash
- Dimensions : 205 x 205mm

CODE: 1223200048



BARNDOR BLK FOR COB CANNON WASH ST

SPECIFICATION

- Barndoor for COB Cannon Wash & COB Cannon Wash DW
- Dimensions : 205 x 205mm

CODE: 1223200047




FS600LED

SPECIFICATION

- Light Source: 1 x 60W High Powered White LED
- Colors: 8 Colors (White, Red, Blue, Green, Orange, Yellow, 3200K (Warm White) & Purple
- Beam Angle: 14 degree - 26 degree
- Typical Throw: 30 meter (14°) to 40 meter (26°)
- LED Strobe Effect: on board control via slider
- Dimming: 0-100% dimming: on board control via slider
- Focus: Manual focusing
- Iris: Manual
- Framing Shutters: Manual
- Connection: 3 and 5 Pin DMX
- Power Draw: 80W
- Multi-Voltage Operation: AC 100-240V 50/60Hz (non switchable)
- Dimensions (LxWxH): 11.5"x19.25"x14.75"/290x484x370mm
- Weight: 18lbs/ 7.8kgs.

CODE: 1226300028


COLORS

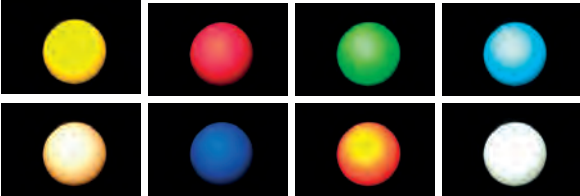

PHOTOMETRICS

	0.5m	1m	2m	3m	4m	5m	Diameter (meters)
12°	0.11	0.22	0.44	0.66	0.88	1.10	(1.10)
WW	94800	30700	5970	2640	1514	958	(LUX)

	0.5m	1m	2m	3m	4m	5m	Diameter (meters)
30°	0.25	0.50	1.00	1.50	2.00	2.50	(2.50)
WW	39600	6760	1346	640	345	209	(LUX)



UV COB CANNON

SPECIFICATION

- Light Source: 1 x 100W COB UV LED
- 3 Operation modes: Sound Active, Manual, & DMX
- 3 DMX Channel Modes: 1/2/3
- Flicker Free operation (No flickering on camera)
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- Beam angle: 33 degrees
- DMX Linkable: 3-pin XLR data connectors
- Power Linkable: Power-Con connectors (Up to 3 UV COB Cannon's @ 120V, 5 UV COB Cannon's @ 220V fixtures)
- Power Draw: 120W total (All LED's @ Full)
- Multi-Voltage Operation: Auto switching, AC 100V - 240V/50Hz -60Hz
- Dimensions (LxWxH): 12.75"x11"x8"/320x278x200mm
- Weight: 11lbs/ 4.98kgs.

CODE: 1224100006



UC-IR
(Sold Separately)
1321000074


UV 72 IP

SPECIFICATION

- Light Source: 24 x 3W UV LEDs
- LUX: 235 @ 2M; 57.7 @ 4M
- Beam Angles: 33-degrees
- PWM frequency: 1000 Hz
- 3 Operational Modes: UV Dimmer Mode; Fade Mode; and DMX Controlled
- 3 DMX Channels: 1/2/3 Channels
- 3-pin DMX IP rated In/Out connections
- Seetronic water proof PowerCON connectors to Daisy chain power
- Remote Control: WiFLY EXR DMX, UC-IR & Airstream IR Compatible
- Multi-Voltage Operation: AC 100-240V, 50/60Hz
- Power Draw: 87W, 0.9Amps @ 120V/60Hz; 84W, 0.5Amps @ 220V/50Hz
- Dimensions (LxWxH): 8.25"x11.50"x8.50"/208.5x292x215mm
- Weight: 12lbs/ 5.5kgs.

CODE: 1226100341



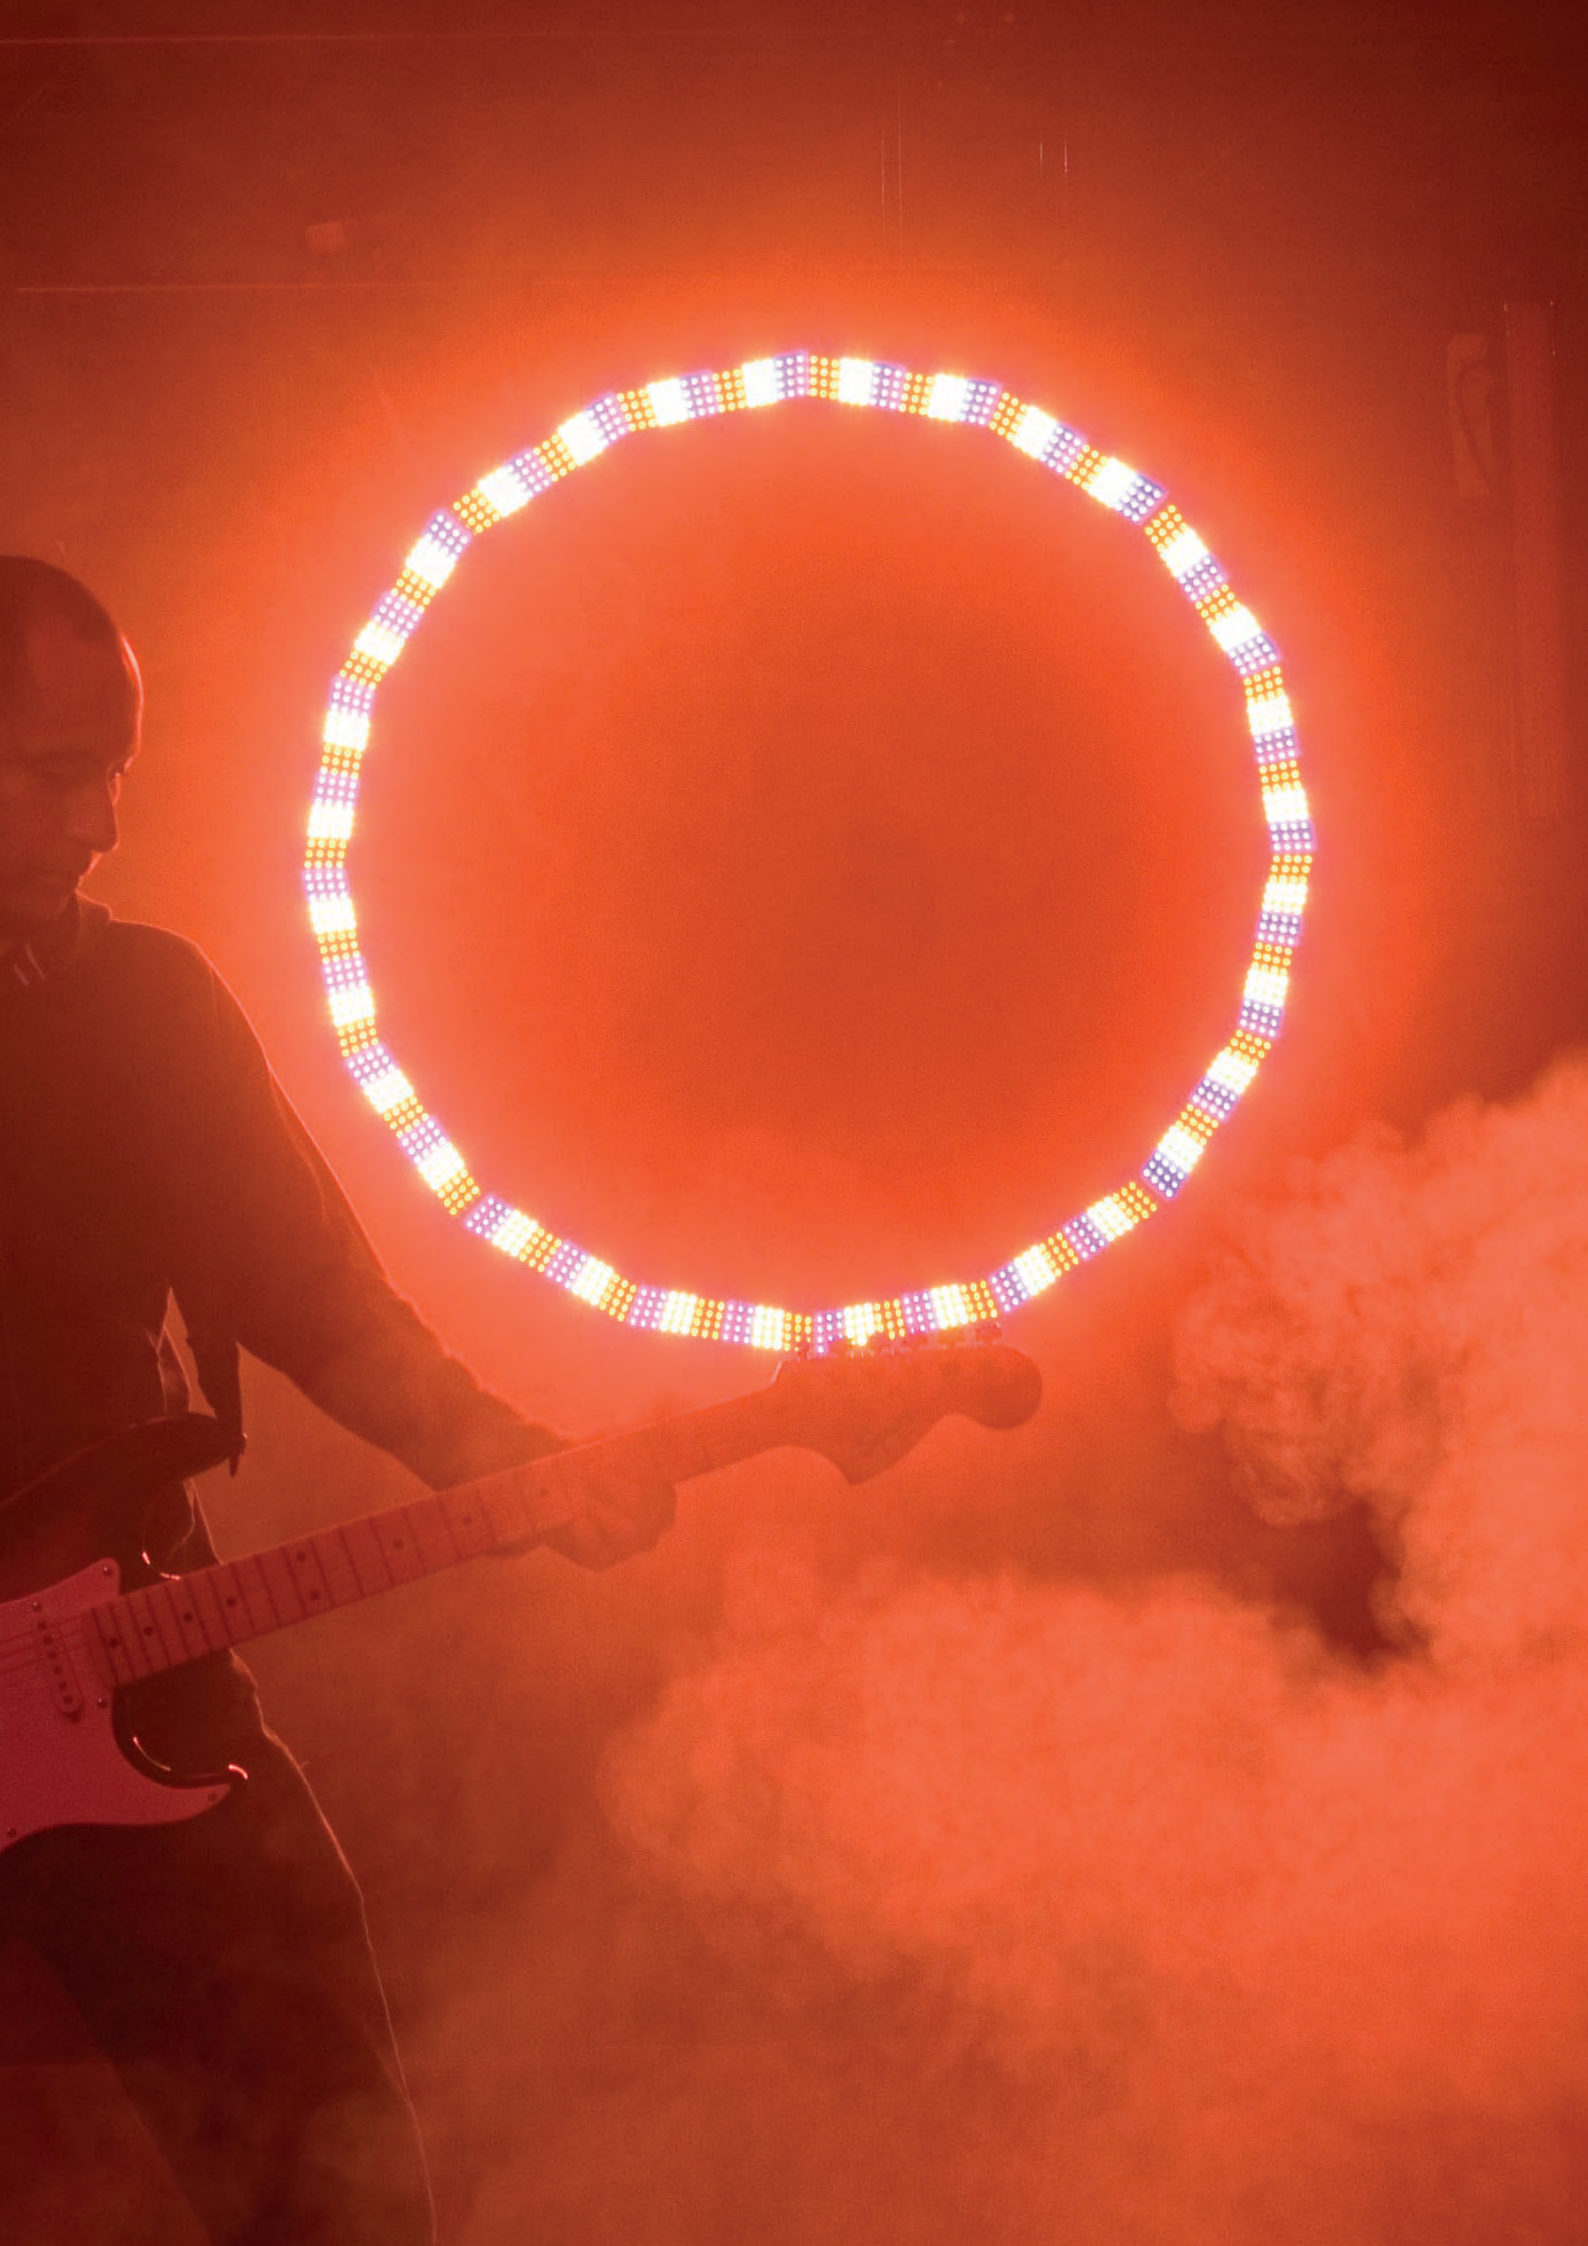

NEW!

ENTOUR ICE

The Entour Ice is a tour-grade low-lying fog machine that creates a thick cloud of smoke that stays close to the floor when used with dry ice. It comes in a road case with casters and features DMX and other on-board controls, a motorized dry ice basket that drops into the water and a low water level sensor that automatically shuts off the pump.

The Entour Ice is ideal for stages, theaters, churches, nightclubs, concert venues and event productions.



SPECIFICATION

- Average run time: 5 minutes
- Requires dry ice and water
- Water Level Sensor: pump automatically turns off when water is too low
- Dry ice consumption: 12 kg/ 3.5 min
- On-board LED display with 6 button control
- Water drain valve: recessed for protection located lower-front of case
- 10-hour holding time of cooler box
- 3 Operating Modes: Built-in timer, Manual, or DMX control
- 3 DMX Channel Modes: 1/2/6
- DMX Input/Output: 3- pin & 5-pin
- Power Inputs: 2x powerCON
- Max Ambient Temperature: 104|40
- Max Surface Temperature: 140|60
- Max Water Temperature: 80., 75., 70., 65.
- Initial heat time: 90 min @ 120V/ 45 min @ 230V
- Power Voltage: 120V~230VAC / 50/60Hz (non-switchable)
- Dual Element Heating System: 2x 1450W @ 120V/ 2x 3000W @ 230V
- Power Draw: (full) 3000W @ 120V/ 6100W @ 230V
- Dimensions: 21.5"x18.25"x24.25"/543x460x617 mm
- Dimensions w/ case: 21.38"x18.11"x4.9"/546x463x632mm
- Water Tank Capacity: 8.5 gal/32 Liters
- Dry Ice Basket Capacity: 26.5lbs/ 12kgs.
- Plus wide-mouth fog dispersion hose adaptor
- Weight: (with wheels no case cover): 72.8lbs/ 33kgs.
- Weight: (with case cover + wheels): 93.7lbs/ 42.5kgs.

CODE: 1411100032

ENTOURAGE

SPECIFICATION

- 1400W Professional grade touring Faze Machine built into a durable flight case
- 3 DMX Channel Modes: 1/2/4
- LCD Function Display with built-in remote with Fog Timer, Continuous Fogging, & Manual Fogging
- Warm-up time: 45 Seconds
- Output: 15,000 cubic ft./425m3 per min
- External fog fluid tank: 5.6 Liter
- 3-pin & 5-pin DMX In/Out
- Power-Con Input
- Only use high quality, water based fog fluid
- Dimensions (LxWxH): 21"x15.25"x9.75"/533x387x249mm
- Weight: 47lbs/ 21.3kgs.

CODE: 1411100019



ENTOUR VENUE

SPECIFICATION

- 1400W Mobile DMX Faze Machine
- 3 DMX Channel Modes; 1/2/4
- LCD Function Display with built-in remote with Fog Timer, Continuous Fogging, & Manual Fogging
- Warm-up time: 45 Seconds
- Output: 15,000 cubic ft./425m3 per min
- External fog fluid tank: 5.6 Liter
- 3-pin & 5-pin DMX In/Out
- Hanging bracket
- Only use high quality, water based fog fluid
- Dimensions (LxWxH): 15.5" x 17" x 10" / 394x434x253mm
- Weight: 23lbs/ 10.6kgs.

CODE: 1411100020



ENTOUR VT-1 CONTROLLER

SPECIFICATION

- VT-1 is a cabled remote control for Entour Cyclone and Entour Snow
- Cable length : 8m
- Connector : 1/4 Stereo Jack
- Dimensions (LxWxH): 90x50x39mm
- Weight: 0,257kg

CODE: 1411100029



ENTOUR HAZE PRO

SPECIFICATION

- No warm up time
- Haze output : 2800 cu.ft – 80m3/min
- Tank capacity : 2,5Lt
- 3 DMX Channel Modes; 1/2/4
- Integrated LED Display with built-In Timer, manual & continuous fogging
- Fluid Consumption Rate: 50ml/hour
- 3 & 5-pin DMX In/Out
- Powercon In
- Power Draw : Min. 420W; max. 660W
- Dimensions : (LxWxH) 21" x 15.25" x 9.75" 533 x 387 x 249 mm
- Weight : 68.3lbs/ 31kgs.

CODE: 1411100028



ENTOUR CYCLONE

SPECIFICATION

- High Velocity Fan for use with Stage Foggers and Hazers/Fazers
- Max Fan volume : 30m3/min
- Fan Angle : 0°-360°
- 2 DMX Channel Modes : 1/2
- Fan Speed adjustment 0-100%
- 4-button LCD Display for easy configuration
- Rotary Speed Knob on rear for manual control
- 1/4 Jack input for optional remote control
- Safety loop on rear
- 3 pin DMX in/out
- PowerCon in/out for daisy-chaining
- Power Draw : 130W Max
- Dimensions : (LxWxH) 13.75"x16.5"x5.25" / 350 x 422x131mm
- Weight : 19lbs/ 8,56kgs.

CODE: 1411100027



ENTOUR SNOW

SPECIFICATION

- Mobile DMX Snow Machine
- 3 DMX Channel Modes; 1/3/5
- LCD Function Display with built-in remote with Timer, Continuous Snow & Manual control
- No warm-up time necessary
- Fan speed adjustment 50% or 100%
- Output: Highest Height: 10m; Longest Distance: 12m
- External fluid tank: 5.6 Liter
- Fluid Consumption Rate: 500ml/min
- Power Draw: 1250W
- 3-pin & 5-pin DMX In/Out
- PowerCON Input
- On/Off button
- 1/4-inch jack for optional remote controller
- Dimensions (LxWxH): 21.5" x 14.75" x 17.25" / 550 x 376 x 439mm
- Weight: 30lbs/ 13.5kgs.

CODE: 1411100026



FOG FURY JETT PRO

SPECIFICATION

- LED and/or FOG effect combination
- WiFLY EXR Wireless DMX (up to 2,500 ft. /760M line of sight)
- ADJ's Electronic Thermo Sensing (ETS) technology
- Safety cable eye bolt
- Optical: 28 x 3-Watt LEDs (6 Red, 7 Green, 6 Blue, 3 Amber & 6 UV LEDs)
- Output: 40,000 Cubic Feet/1.132m3 Per minute
- Heater: 1450 Watts
- Heat Up Time: 9 min
- Fluid Type: Water Based Fog Fluid, ADJ Fog Juice CO2
- Fluid Consumption: 150ml/min
- On board control or Wireless DMX
- Data: 3-pin & 5-pin DMX In/Out
- DMX Channels: 1, 2, 3, 7 or 9 DMX Channels
- Integrated WiFLY EXR Wireless DMX
- Remote Control Included: FFJWR
- Tank Size: 2.5 Liter removable tank
- Dimensions (LxWxH): 16.5"x12.5"x8"/419x315x206mm
- Weight: 21lbs/ 9.5kgs.

CODE: 1411100021



FFJPWR WR FOR FOG FURY JETT PRO

- Wireless Remote for Fog Fury Jett Pro

CODE: 1221000009



ADJ TOURING CASES

ADJ TOURING CASE 6x LED PAR UNIVERSAL
Code: 1521000254

ADJ TOURING CASE 2x VIZI CMY 300
Code: 1521000340

ADJ TOURING/CHARGING CASE 6X ELEMENT PAR
Code: 1521000327

ADJ TOURING CASE 2X VIZI BEAM 5RX
Code: 1521000253

ADJ TOURING CASE 2X VIZI HYBRID 16RX
Code: 1521000285

ADJ TOURING CASE 2X VIZI BSW 300
Code: 1521000309

ADJ TOURING CASE 4X VIZI HEX/QWASH7
Code: 1521000311

ADJ TOURING CASE 4X FOCUS SPOT THREE Z
Code: 1521000284

ADJ TOURING CASE 4X VIZI BEAM RXONE
Code: 1521000283

ADJ TOURING CASE 6X 7PZ IP
Code: 1521000310

ADJ TOURING CASE 8XAV6
Code: 1521000306

ADJ TOURING CASE 8X AV3/AV4
Code: 1521000305

ADJ TOURING CASE 8X AV2
Code: 1226300118





pure LIGHTING
EXCITEMENT



Follow us:



youtube/adjlighting | twitter.com/americanadj
facebook.com/americanadj
instagram/americanadj
pinterest.com/americanadj
www.adj.eu

